




AS 9400 - Adjustable Brace Fitting

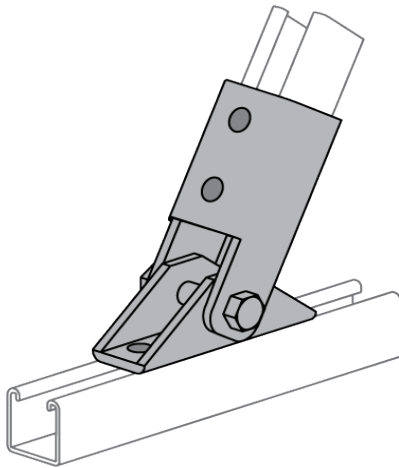

Standard Dimensions:

- **Hole Diameter:** $\frac{9}{16}$ " (14mm)
- **Hole Spacing (From End):** $\frac{9}{16}$ " (21mm)
- **Hole Spacing (On-Center):** $1 \frac{7}{16}$ " (48mm)
- **Width:** $1 \frac{1}{4}$ " (41mm)
- **Thickness:**
 - $\frac{1}{4}$ " (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or
 - 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

Part No.	Finish	Product Weight / Piece (lbs)
PS 9400	EG	3.07
PS 9400	HD	3.25
PS 9400	GR	3.07
PS 9400	SS6	3.07

Materials & Finishes - Standard:

- **Base Metal:** Steel conforms to ASTM A1011 SS GR 33, A1011 HSLAS GR 45, A36, A575, A576, or A635.
- **Electrogalvanized (EG):** Conforms to ASTM B633, Type III SC1
- **Hot Dip Galvanized (HD):** Conforms to ASTM A123 or A153
- **Perma-Green (GR):** Conforms to commercial standards for powder coating
- **Perma-Gold (GD):** Conforms to ASTM B633, Type II SC1 **Plain**
- **(PL):** No finish

Materials & Finishes - Special Metals:

- **Stainless Steel, Type 304 (SS4):** Conforms to ASTM A240 or A276, Type 304 *
- **Stainless Steel, Type 316 (SS6):** Conforms to ASTM A240 or A276, Type 316 *
- **Aluminum (AL):** Conforms to ASTM B209, Type 1100F or 5052-H32 *