



DELIVERING THE COMPONENTS THAT SUPPORT OUR WORLD.

Since 1973, PUPCO has been serving the needs of electrical and mechanical distributors throughout the United States. Today, PUPCO is the industries' go-to wholesale distribution partner, with large state of the art facilities in Charlotte, North Carolina and in North Jackson, Ohio.

PUPCO is excited to introduce our new and improved catalog to our customers, both new and old. Inside these pages you will find a sampling of the products and finishes available. Please contact your sales representative for any needs which are not represented. We likely have the product on-hand, or we can get it for you in short order.

Our vast inventory includes hard-to-find electrical and mechanical infrastructure items in various finishes, with which we can fulfill your just-in-time, stocking, dedicated inventory, and direct shipping needs.

With a total of over 85 years of helpful and knowledgeable sales experience, we are here to assist our customers to ensure they have the products needed to keep their customer's construction jobs running on time and on budget. Contact us today and let's get to work delivering the components that support our world.

CONTENTS INSIDE:

CHANNEL

4

THREATED ROD

15

CABLE TRAY

18

FITTINGS

22

BEAM CLAMPS

44

PIPE CLAMPS

52

PIPE HANGERS

60

U-BOLTS

66

FASTENERS

68

ADDITIONAL PRODUCTS

70





NORTH

12240 Commissioner Drive, North Jackson, OH, 44451

330-992-2823



SOUTH

8710 Air Park West Drive, Suite 100, Charlotte, NC, 28214

704-375-0776



STRUT CHANNEL OVERVIEW

- Installs Quickly
- Adjustable to Fit Any Need
- No Drilling, Welding or Special Tools Needed

Strut Channel framing systems provide continuous, fully customizable, metal channels and fittings to suit a myriad of construction needs, including support for sprinkler systems, electrical conduit or other piping, erection of scaffolding, mezzanines, walkways or guardrails and in the installation of conveyor systems, solar farms or data centers.

Concrete Insert Strut Channel provides a continuous slotted channel in floors, walls or ceilings.



SAW


Strut Channel is easy to cut to desired lengths with a hack saw, chop saw, or powered band saw. Or let us do the work for you! Speak with your sales representative about our cutting and kitting services. We have the tools to cut Strut Channel to the desired lengths and we can bundle the pieces into kits for easy job-site installation.



WRENCH

Channel Nuts are inserted parallel to the Strut Channel and are then depressed and twisted to fit under the in-turned edges of the Strut Channel. The Channel Nut may be slid to any location on the channel, allowing for complete adjustability. When released, the Channel Nut will lock in place. Channel Nuts with springs are designed to hold the Channel Nut in place during assembly.

Fittings or Brackets are placed on the face of the Strut Channel over the Channel Nut. Hex Head Bolts are used to attach the Fittings or Brackets to the Channel Nuts, thereby locking the assembly in place.

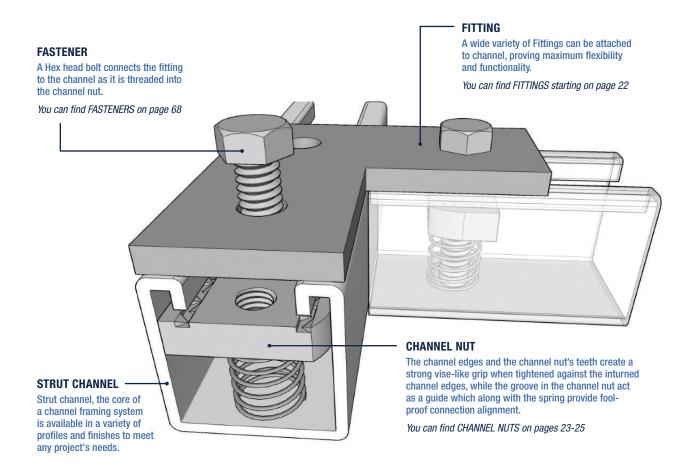

FASTENERS

ADDITIONAL PRODUCTS

STRUT CHANNEL SYSTEMS

Strut Channel Systems are designed to support mechanical and electrical infrastructure in industrial and commercial applications by providing a framework to which to mount, support, brace, or connect electrical and data wires, pipes, ventilation systems, etc. Strut channels are manufactured by a series of forming rolls, which slowly work the steel into the desired channel shape. PUPCO offers unmatched product availability in standard and hard-to-find profiles and finishes to keep our distributor's customer's projects on schedule and on budget.


PART NUMBER	1	112	122	132	134	142	152	162	164	172	179	189
PART SIZE		3 1/4' x 1 5/8"	2 7/16" x 1 5/8"	15/8" x 15/8"	15/8" x 15/8"	13/8" x 15/8"	1" x 1 5/8"	13/16" x 1 5/8"	13/16" x 1 5/8"	7/8" x 1 5/8"	13/16" x 13/16"	13/32" x 13/16"
PART GAUGE		12 ga.	12 ga.	12 ga.	14 ga.	12 ga.	12 ga.	12 ga.	14 ga.	12 ga.	19 ga.	19 ga.
FINISH												
Pre-Galvanized Steel	PG	SS	SS	SS	SS	*	SS	SS	SS	SS	*	*
Plain Steel	ВК	SS	*	SS	*	*	*	*	SS	SS	*	*
Hot Dipped Galvanized Steel	HD	SS	*	SS	*	*	*	*	SS	SS	*	*
Aluminum	AL	*	*	SS	*	*	*	*	SS	*	*	*
Gold - Zinc Trivalent Chromium	GD	*	*	SS	SS	*	*	*	SS	*	*	*
Stainless Steel 304	SS4	SS	*	SS	SS	*	*	SS	SS	*	*	*
Stainless Steel 316	SS6	*	*	SS	SS	*	*	*	*	*	*	*
Powder Coated Green	GR	SS	*	SS	*	*	*	*	*	*	*	*
Powder Coated White	WH	*	*	*	*	*	*	*	*	*	*	*
Powder Coated Grey	GY	*	*	*	*	*	*	*	*	*	*	*
Powder Coated Black	BLK	*	*	*	*	*	*	*	*	*	*	*
LENGTH												
10 Feet	10	SS	SS	SS	SS	*	*	SS	SS	SS	*	*
20 Feet	20	SS	SS	SS	SS	*	SS	SS	SS	SS	*	*
Custom Length		SS	SS	SS	SS	*	*	SS	SS	SS	*	*
PERFORATION OPTIONS												
Oblong Slot	0S	SS	SS	SS	SS	*	SS	SS	SS	SS	*	*
Round Hole	RS	*	*	SS	*	*	*	*	*	*	*	*
Round Hole - 3 Sides	RS3	*	*	*	*	*	*	*	*	*	*	*
Knock Out	K0	*	*	SS	*	*	*	*	*	*	*	*
Solid		SS	*	SS	SS	*	*	SS	SS	SS	*	*
Specialty		*	*	*	*	*	*	*	*	*	*	*
WELDING COMBINATION	S											
Back to Back	Α	SS	SS	SS	*	*	*	*	SS	SS	*	*
Side to Side	В	*	*	*	*	*	*	*	*	*	*	*
Side to Back	С	*	*	SS	*	*	*	*	*	*	*	*
Custom Combinations		*	*	*	*	*	*	*	*	*	*	*

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Please contact us for any other specialty combinations. Please include MTR requests on initial RFQ.

Spec sheets are available on request.

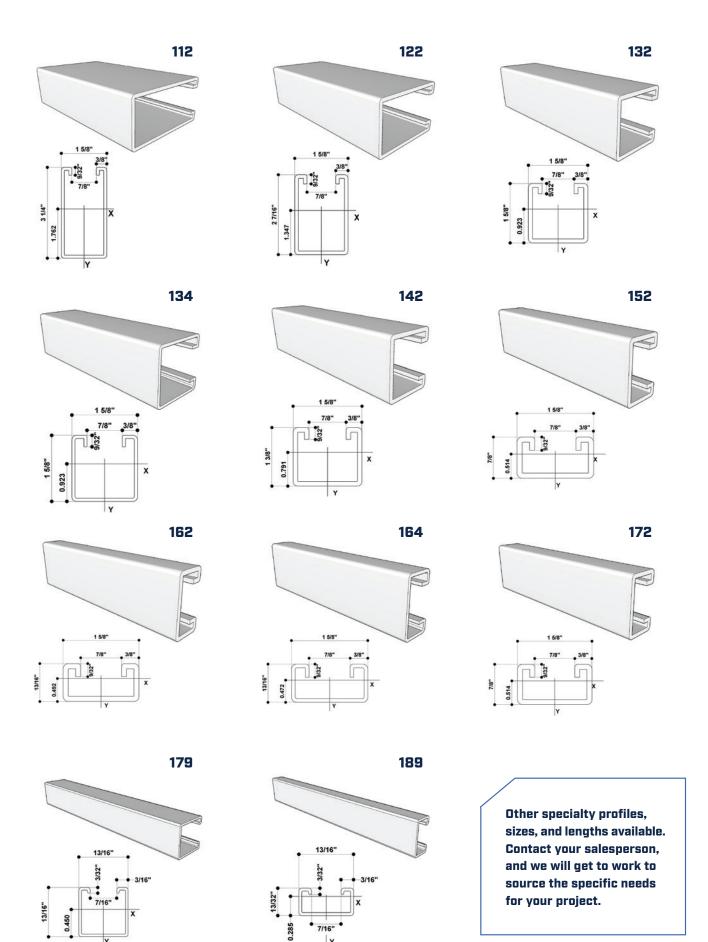

STRUT CHANNEL SYSTEMS

PERFORATION OPTIONS



OBLONG SLOT (OS)

Oblong Slot Channel has 9/16" x 11/8" slots, 2" on centers. Oblong Slot Channel is the most used functionality as it allows for the most flexibility when attaching fittings and fasteners.



ROUND HOLE (RS)

Round Hole Channel has 9/16" (3/4") diameter holes, 1 7/8" on centers. Round Hole Channel is used for symmetrical spacing of fittings and fasteners.



ROUND HOLE - 3 SIDES (RS3)

Round Hole Channel - 3 sides has 9/16" (3/4") diameter holes, 1 7/8" on centers on all three sides of the channel. Round Hole Channel is used for symmetrical spacing of fittings and fasteners. Having the holes on all three sides allows for multi-directional attachment of fittings and fasteners.



KNOCK OUT (KO)

Knock Out Channel has partially drilled 7/8" diameter holes, 6" on centers. Knock Out Channel is used in applications where holes are 'knocked out' where needed.



SOLID

Solid channel is the strongest of the available options and is used in applications where holes are not required or drilled to suit the needs of the project.

SPECIALTY

Other functionalities, i.e. 4" on center slot and rectangular slot are available on request. Please contact us, we are happy to assist.

U-BOLTS

FASTENERS

ADDITIONAL PRODUCTS

STRUT CHANNEL SYSTEMS

WELDED COMBINATION



BACK TO BACK (A)

Back to Back Channel is two pieces of channel of a given size and gauge, where the backs are spot welded together at either 2" or 3" centers forming openings on the top and bottom of the channel.



SIDE TO SIDE (B)

Side to Side Channel is two pieces of channel of a given size and gauge, where the sides are spot welded together at either 2" or 3" centers forming openings on either the same side of the channel or opposite sides of the channel.



SIDE TO BACK (C)

Side to Back Channel is two pieces of channel of a given size and gauge, where the side of one piece of channel is spot welded to the back of the other piece of channel at either 2" or 3" centers forming openings on the top and side of the channel.



CUSTOM COMBINATIONS

Many other combinations of channel are available including 3 and 4 piece combinations. Call us with your needs and we will be happy to help.

FIBERGLASS CHANNEL

Fiberglass Channel is a non-metallic, lightweight, yet strong and supportive Strut Channel framing system that is resistant to corrosion and flame retardant.

PUPCO also offers Fiberglass Fittings, Fasteners and Accessories to complete framing systems as required by job specifications. Please look for the FG finish throughout the catalog. Please also contact your sales representative who will be happy to source needed fiberglass products.

PUPCO offers the full line of Aickinstrut Products. Aickinstrut profile fiberglass strut is compatible with Aickinstrut fittings only. Aickinstrut standard profile (SST) is compatible with standard strut pipe clamps and fittings.

				FINISH OPTIONS					
FIBERGLASS CHAN	INEL	Purpose	Size	Profiles Aickinstrut	Standard SST	Polyester P	Vinyl Ester V	PVC E	
20	1000	Light Duty	1 1/8" x 1 5/8"	SS	*	SS	*	*	
20	2000	Heavy Duty	1 5/8" x 1 5/8"	SS	SS	SS	*	*	
LENGTH									
10 Feet				SS	SS	SS	*	*	
20 Feet				*	*	*	*	*	
PERFORATION OPT	IONS								
Solid	2000			SS	SS	SS	*	*	
Slotted	2200			*	*	SS	*	*	
COMBINATIONS									
Back to Back	2100			*	*	*	*	*	
Concrete Insert	2300			*	*	*	*	*	

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

 $\label{eq:please} \textit{Please include MTR requests on initial RFQ}. \ \ \textit{Spec sheets are available on request}.$



CUTTING 8 KITTING

PUPCO offers Cutting and Kitting services whereby we can cut and bundle Strut Channel to desired lengths. This saves time and money when the material arrives to your customers job-site ready to install. We also bundle kits of Strut Channel, Fasteners and Fittings so that they can be readily distributed at the job-site. Please contact your sales representative for details.

CUTTING AND KITTING BENEFITS

- Material arrives ready for install and on-site distribution
- Reduce waste on site
- Minimize material prep time and on-site labor expense
- Ensure consistency of cut and length


TERMS AND CONDITIONS LANGUAGE

When cuts are from standard stock lengths of 10 feet or 20 feet, customers will be charged for the full length of material. Cut material is non-returnable. Scrap material will only be shipped upon request. Cutting charges will be invoiced as a separate item and vary depending on total quantity of strut and number of cuts.



CONCRETE INSERT STRUT CHANNEL

Concrete Insert Strut Channel is used to create a continuous slotted channel in concrete floors, walls, or ceilings. Concrete Insert Strut Channel is supplied and end cap and either foam filler or a plastic strip to prevent concrete.

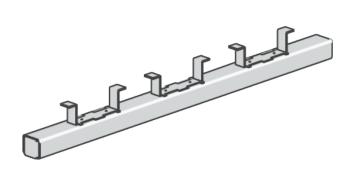

PART NUMBER		132	142	152	164	172
PART SIZE		15/8" x 15/8"	13/8" x 15/8"	1" x 1 5/8"	13/16" x 1 5/8"	7/8" x 1 5/8"
PART GAUGE		12 Gauge	12 Gauge	12 Gauge	14 Gauge	12 Gauge
FINISH						
Pre-Galvanized Steel	PG	*	SS	*	*	*
Plain Steel	ВК	*	*	*	*	*
Hot Dipped Galvanized Steel	HD	*	*	*	*	*
Electro Galvanized	EG	*	*	*	*	*
Stainless Steel 304	SS4	*	*	*	*	*
Stainless Steel 316	SS6	*	*	*	*	*
LENGTH						
10 Feet	10	*	*	*	*	*
20 Feet	20	*	SS	*	*	*
Custom Length		*	*	*	*	*
PERFORATION OPTIONS						
Oblong Slot	0S	*	*	*	*	*
Round Hole	RS	*	*	*	*	*
Round Hole - 3 Sides	RS3	*	*	*	*	*
Knock Out	КО	*	*	*	*	*
Solid		*	SS	*	*	*
Specialty		*	*	*	*	*
Fill						
Plastic		*	*	*	*	*
Foam	FOAM	*	SS	*	*	*

FINISH OPTIONS

EG: Electro Galvanized **AL:** Aluminum

HD: Hot Dipped Galvanized Steel **GD:** Gold-Zinc Trivalent Chromium

\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316


AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. In addition to the offerings illustrated, hundreds of other channels are available for specific applications.

STRUT CHANNEL ACCESSORIES

ACCESSORIES


END CAPS						FINISH OPTIONS					
PART NUMBER	STYLE	CHANNEL DEPTH (A)	CHANNEL PART NUMBER	DIMENSIONS (B)	CONDUIT/ ROD SIZE	EG	HD	SS4	SS6	AL	
653	Type B Concrete Insert	1 3/8"	142	3"	N/A	*	*	*	*	*	
654	Type B Concrete Insert	1"	152	2 7/8"	N/A	*	*	*	*	*	
655	Type A Concrete Insert	1 5/8"	132	N/A	N/A	SS	*	*	*	*	
656	Type A Concrete Insert	1 3/8"	142	N/A	N/A	SS	*	*	*	*	
901	Type A Concrete Insert	1"	152	N/A	N/A	*	*	*	*	*	
902	Type A Concrete Insert	3 1/4"	112	N/A	N/A	*	*	*	*	*	
930	Type A Concrete Insert	13/16"	164	N/A	N/A	SS	*	*	*	*	
2511212	Knock-Out	1 5/8"	132, 134	1 3/4"	1/2"	*	*	*	*	*	
2511234	Knock-Out	1 5/8"	132, 134	1 3/4"	3/4"	*	*	*	*	*	
2585	Type A Concrete Insert	1 5/8"	134	N/A	N/A	*	*	*	*	*	



653, 654 **TYPE B CONCRETE INSERT END CAP**



655, 656, 901, 902, 930, 2585 **TYPE A CONCRETE INSERT END CAP**



2511 **KNOCK-OUT END CAP**

FINISH OPTIONS

EG: Electro Galvanized AL: Aluminum

HD: Hot Dipped Galvanized Steel **GD:** Gold-Zinc Trivalent Chromium

\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316


AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. In addition to the offerings illustrated, hundreds of other channels are available for specific applications.


ADDITIONAL PRODUCTS

STRUT CHANNEL ACCESSORIES (CONTINUED)


PLASTIC END CA	PLASTIC END CAPS					INISH OPTION	IS		
PART NUMBER	STYLE	CHANNEL DEPTH (A)	CHANNEL PART NUMBER	BLACK	GRAY	WHITE	GREEN	RED	YELLOW
6152	Decorative	1 5/8"	132, 134	*	*	*	*	*	*
6153112	Safety	3 1/4"	112	*	*	SS	*	*	*
6153122	Safety	2 7/16"	122	*	*	*	*	*	*
6153132	Safety	1 5/8"	132, 134	SS	SS	*	*	SS	SS
6153164	Safety	13/16"	164	*	*	SS	*	*	SS
6154112	Open End	3 1/4"	112	*	*	*	*	*	*
6154132	Open End	1 5/8"	132, 134	*	SS	*	*	*	*
6154164	Open End	13/16"	164	*	*	*	*	*	*
B82522GREY	Push-In	1 5/8"	132, 134	*	SS	*	*	*	*
B82552GREY	Push-In	13/16"	164	*	*	*	*	*	*











6152 **DECORATIVE PLASTIC END CAPS**


6153 **SAFETY PLASTIC END CAPS**


6154 **OPEN END PLASTIC END CAPS**

B82522 **PUSH-IN PLASTIC END CAPS**

B82552 **PUSH-IN PLASTIC END CAPS**

CLOSURE STRIP			FINISH OPTIONS					
PART NUMBER	COMPOSITION	LENGTH	BLACK	GRAY	WHITE	PG	AL	SS4
6151	Plastic	10'	SS	SS	*	N/A	N/A	N/A
707	Steel	10'	N/A	N/A	N/A	SS	*	*





6151 **PLASTIC CLOSURE STRIPS**

STEEL CLOSURE STRIPS

FINISH OPTIONS

EG: Electro Galvanized AL: Aluminum

HD: Hot Dipped Galvanized Steel GD: Gold-Zinc Trivalent Chromium

\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability. In addition to the offerings illustrated, hundreds of other channels are available for specific applications.

THREADED

Rod is used to pin, fasten, or connect two materials together and is an integral part of strut channel framing systems. PUPCO offers Full Body Threaded Rod, Solid Body Rod and Studs.

THREADED ROD OVERVIEW

Threaded Rod is continuously threaded from one end to the other for use as a fastener in Strut Channel Systems and countless other construction and manufacturing applications. Threaded rod is available in many finishes, diameters, and lengths. Finishes include Hot Dipped Galvanized Steel, Stainless Steel, and Fiberglass, each of which serve specialized construction requirements. Typical diameters are 1/4", 3/8", 1/2" and 5/8", but we also stock many other diameters. Threaded Rod is available in standard lengths of 6, 10 & 12 feet.

PUPCO offers both Full Thread and Solid Body Rod. Solid Body Rod does not have threads and is typically used in applications where 'wash-downs' are mandatory. Contractors thread only the portion of the rod needed, leaving the remaining length solid to provide a washable surface.

PUPCO also offers fasteners to support Threaded Rod installation, including rod couplers, reducing rod couplers and rod end caps.

If you have a specialized need, please contact your sales representative they will be happy to source the needed product.



	-						
PART NUMBER		TR14	TR38	TR12	TR34	TR58	TR78
DIAMETER		1/4"	3/8"	1/2"	3/4"	5/8'	7/8"
FINISH							
Zinc	ZN	SS	SS	SS	SS	SS	*
Hot Dipped Galvanized Steel	HD	*	SS	SS	*	*	*
Stainless Steel 304	SS4	SS	SS	SS	SS	SS	*
Stainless Steel 316	SS6	*	SS	SS	*	*	*
Fiberglass 8 feet only	FG	*	SS	*	*	*	*
LENGTH							
6 Feet Stainless Only	6	*	SS	SS	*	SS	*
8 Feet Fiberglass Only	8	N/A	SS	N/A	N/A	N/A	N/A
10 Feet Zinc & Hot Dipped Only	10	SS	SS	SS	SS	SS	*
12 Feet Stainless Only	12	SS	SS	SS	SS	SS	*
6 Inches	STUD6	*	*	*	*	*	*
12 Inches	STUD12	*	*	*	*	*	*
Custom Length		*	*	*	*	*	*
THREAD							
Full Thread	TR	SS	SS	SS	SS	SS	SS
Solid Body	FB	*	*	*	*	*	*

AVAILABILITY


SS: Standard stocking item. *: Please contact us for availability.

Spec sheets are available on request.

THREADED ROD ACCESSORIES

ACCESSORIES

COUPLING NUTS			FINISH (OPTIONS	
PART NUMBER	SIZE	EG	НО	SS4	SS6
RC14	1/4" x 7/8"	*	*	*	*
RC1234	1/2" x 3/4"	*	*	*	*
RC12114	1/2" x 1 1/4"	SS	*	SS	*
RC12134	1/2" x 1 3/4"	*	*	*	*
RC1212	1" x 2 1/2"	*	*	*	*
RC38118	3/8" x 1 1/8"	SS	*	SS	*
RC38134	3/8" x 1 3/4"	*	*	*	*
RC58218	5/8" x 2 1/8"	SS	*	*	*
RC34214	3/4" x 2 1/4"	*	*	*	*
RC78212	7/8" x 2 1/2"	*	*	*	*



COUPLING NUTS

REDUCING ROD CO	IUPLING NUTS	FINISH OPTIONS			
PART NUMBER	SIZE	EG	SS4		
RRC3814	3/8" x 1/4"	*	*		
RRC1238	1/2" x 3/8"	*	*		
RRC11212	1 1/2" x 1/2"	*	*		
RRC12114	1/2" x 1 1/4"	*	*		
RRC5812	5/8" x 1/2"	*	*		
RRCD7812	7/8" x 1/2"	*	*		





ROD END CAP		FINISH OPTIONS
PART NUMBER	SIZE	BLACK PLASTIC
REC14	1/4"	*
REC38	3/8"	*
REC12	1/2"	*
REC58	5/8"	*



ROD END CAP

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **\$34:** Stainless Steel 304 **\$\$6:** Stainless Steel 316

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Spec sheets are available on request.



We exclusively offer US Tray
cable tray solutions. US Tray
is the go-to ladder cable tray
manufacturer known for high quality,
trusted products made in America.
US Tray is well-known by industry
experts worldwide, serving a global
customer base.

CABLE TRAY OVERVIEW

US TRAY


US Tray's I-Beam Ladder Cable Trays are a core solution and iconic design in the cable tray industry, making it the most common cable tray solution. I-Beam Ladder Cable Trays feature 3-inch tangents and are easily connectible with fittings and accessories.

WHY ALUMINUM

Aluminum is the preferred material for cable tray as it is sturdy while being lightweight and resistant to corrosion. Aluminum cable tray works in many settings and is easy to install and maintain.

BENEFITS

- Aluminum Cable Trays are the most economical choice for creating ideal routing paths for cables.
- Aluminum Ladder Cable Trays have a rung design that enables cables to be tied down or to exit the path where necessary.
- Aluminum Ladder Cable Trays promote ventilation and prevent the accumulation of dust, debris and moisture.
- Aluminum Ladder Cable Trays allow for easy additions and movement of powered equipment by allowing for open cable access.
- Aluminum Ladder Cable Trays are designed for ease of use by construction and electrical professionals, while protecting the cables from unauthorized access.
- Aluminum Ladder Cable Tray solutions can be seamlessly modified, extended, or removed.

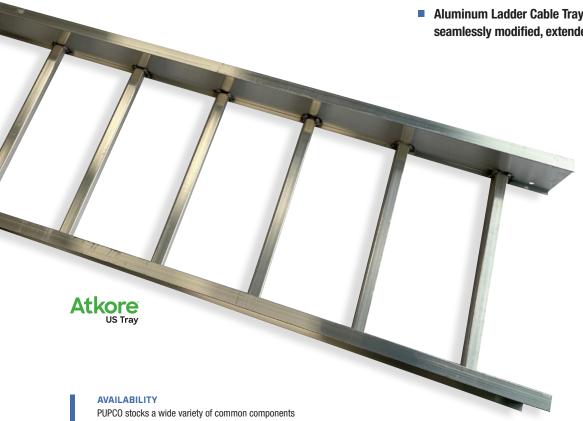

for ladder cable tray systems to meet your customers' immediate needs. For special project needs, contact your salesperson and we'll consult with you to determine the best product fit and delivery to meet your timeline. **ADDITIONAL PRODUCTS**

ALUMINUM LADDER TRAY





ALUMINUM LADDER TRAY


Aluminum Cable Trays are the most common cable tray solution used for protecting and supporting power and control cables. The trays mimic the rungs of a ladder and are installed horizontally or vertically. Aluminum Cable Trays are ideal for holding and managing larger cables and are often used in the construction and upgrade of automotive, power, commercial, oil and gas, and industrial projects.

FLEXIBILITY


To ensure cable tray solutions meet your customer's design specifications, we offer a vast array of ladder tray fittings including but not exclusively the list below:

- Horizontal Elbows
- Vertical Elbows
- Tees
- Reducers
- Cross Pieces
- Branches

Our team is happy to provide guidance and assistance on which fittings to choose to meet both basic and complex project needs.



OUTSIDE VERTICAL



RIGHT BRANCH

INDUSTRY STANDARDS

US Tray manufactures ladder cable solutions to meet the highest industry standards:

- UL-classified, UL-listed
- Meet National Electrical Manufacturers Association (NEMA) VE-1, metal cable tray standards.
- Aluminum cable trays meet NEMA loading requirements, crafted in extruded 603-T6 material


CABLE TRAY FITTINGS CLASSES

Class 1: Designed for use with NEMA Classes 12B and 12C cable trays. These systems have 1 1/8" wide side rail flanges and 4-hole splice plates.


Class 2: Designed for use with NEMA Classes 20A, 20B, and 20C cable trays. These systems have 2" wide side rail flanges and 4-hole splice plates.

Class 3: Designed for use with NEMA Classes that exceed 20C. These systems have 2 3/8" wide side rail flanges and 8-hole splice plates.

Class 4: Designed for use with A820E cable tray systems, which are 8" high. These systems have 2 3/4" wide side rail flanges and 8-hole heavy-duty splice plates.



LADDER VERTICAL TEE



HORIZONTAL CROSS

AVAILABILITY

Many other fittings are available, please contact your sale rep for details.

BASKET TRAY



US TRAY

US Tray's Wire Mesh Basket Trays are designed as an affordable solution to keeping cables in order and protected. Wire basket cable trays are crafted from strong and durable steel wire, welded to create a 2" x 4" grid. Wire mesh is a durable yet lightweight solution for cable support.

FINISHES

For the majority of indoor applications, electro-plated zinc galvanized finish is the preferred material for Wire Mesh Basket Travs.

For outdoor applications, corrosion resistance can be increased by using 304 or 316 stainless steel or with a powder coated solution in your choice of color.

SIZING

Standard Wire Mesh Basket Trays are 10' long and either 2", 4", or 6" deep to meet a variety of installation needs. All depths are offered in 24' widths.


BENEFITS

- Wire Mesh Basket Trays keep cables cool by allowing air to flow freely and dissipate heat. They also help prevent the buildup of debris and dust that can gather along cable lines with time.
- Also known as datacenter trays, Wire Mesh Basket Trays are ideal for use with communication cables, signal cables, fiber optics, ethernet, low-voltage cables or in a telecom setting. However, Wire Mesh Basket Tray is also perfect for use in offices, hospitals, hospitality, industrial manufacturing, educational, pharmaceutical and food processing applications.
- Wire Mesh Basket Trays have a self-splicing solution which makes them easy to connect, resulting in reduced manual labor cost.
- Wire Mesh Basket Trays are easy to customize, modify, extend, expand, or remove.
- To ensure your Wire Mesh Basket Tray solution is designed for your application, we offer a vast array of fittings and accessories. Most of which are built with Quick-Latch technology allowing the system to fit and fasten perfectly with no tools required.


AVAILABILITY

Please contact us for availability.


TEE AND CROSS




90° SHORT RADIUM BEND



90° LONG RADIUM BEND



RISERS





CHANNEL NUTS


REGULAR SPRING	NUTS			FINISH OPTIONS					
PART NUMBER	SIZE	THICKNESS	вох оту	EG	HD	SS6	AL		
RS832	8/32"	1/4"	100	*	*	*	*		
RS1032	10/32"	1/4"	100	*	*	*	*		
RS1024	10/24"	1/4"	100	*	*	*	*		
RS14	1/4"	1/4"	100	SS	SS	SS	*		
RS516	5/16"	3/8"	100	SS	*	*	*		
RS38	3/8"	3/8"	100	SS	SS	SS	*		
RSS38	3/8"	1/4"	100	*	*	*	*		
RS716	7/16"	3/8"	100	*	*	*	*		
RS12	1/2"	1/2"	100	SS	SS	SS	*		
RSS12	1/2"	3/8"	100	*	*	*	*		
RS58	5/8"	7/16"	50	SS	*	*	*		
RS34	3/4"	7/16"	50	*	*	*	*		
RS78	7/8"	7/16"	50	*	*	*	*		



REGULAR SPRING NUTS

Channel Compatibility: 132, 134, 142

SHORT SPRING NI	JTS			FINISH OPTIONS					
PART NUMBER	SIZE	THICKNESS	вох оту	EG	HD	SS6	AL		
SS832	8/32"	1/4"	100	*	*	*	*		
SS1032	10/32"	1/4"	100	*	*	*	*		
SS1024	10/24"	1/4"	100	*	*	*	*		
SS14	1/4"	1/4"	100	SS	*	*	*		
SS516	5/16"	3/8"	100	*	*	*	*		
SS38	3/8"	3/8"	100	*	*	SS	*		
SSS38	3/8"	1/4"	100	*	*	*	*		
SS716	7/16"	3/8"	100	*	*	*	*		
SSS12	1/2"	3/8"	100	*	*	*	*		
SS58	5/8"	7/16"	50	*	*	*	*		



SHORT SPRING NUTS

Channel Compatibility: 152, 162, 164, 172, 179

FINISH OPTIONS

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Spec sheets are available on request.

CHANNEL NUTS (CONTINUED)

NO-SPRING NUTS					FINISH	OPTIONS	
PART NUMBER	SIZE	THICKNESS	вох оту	EG	HD	SS6	AL
NS832	8/32"	1/4"	100	*	*	*	*
NS1032	10/32"	1/4"	100	*	*	*	*
NS1024	10/24"	1/4"	100	*	*	*	*
NS14	1/4"	1/4"	100	SS	*	*	*
NS516	5/16"	3/8"	100	SS	*	SS	*
NS38	3/8"	3/8"	100	SS	*	SS	*
NSS38	3/8"	1/4"	100	*	*	*	*
NS716	7/16"	3/8"	100	*	*	*	*
NS12	1/2"	1/2"	100	SS	SS	SS	*
NSS12	1/2"	3/8"	100	SS	*	*	*
NS58	5/8"	7/16"	100	SS	*	*	*
NSS58	5/8"	3/8"	100	*	*	*	*
NS34	3/4"	7/16"	100	SS	*	*	*
NS78	7/8"	7/16"	100	*	*	*	*



NO-SPRING NUTS
Channel Compatibility: ALL

LONG SPRING NU	TS				FINISH (OPTIONS	
PART NUMBER	SIZE	THICKNESS	вох оту	EG	HD	SS6	AL
LS832	8/32"	1/4"	50	*	*	*	*
LS1032	10/32"	1/4"	50	*	*	*	*
LS1024	10/24"	1/4"	50	*	*	*	*
LS14	1/4"	1/4"	50	*	*	*	*
LS516	5/16"	3/8"	50	*	*	*	*
LS38	3/8"	3/8"	50	*	*	*	*
LSS38	3/8"	1/4"	50	*	*	*	*
LS716	7/16"	3/8"	50	*	*	*	*
LS12	1/2"	1/2"	50	*	*	*	*
LSS12	1/2"	3/8"	50	*	*	*	*
LS58	5/8"	7/16"	50	*	*	*	*
LS34	3/4"	7/16"	50	*	*	*	*



FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **SS6:** Stainless Steel 316 **AL:** Aluminum

AVAILABILITY


SS: Standard stocking item. *: Please contact us for availability.

Spec sheets are available on request.

PIPE CLAMPS | PIPE HANGERS | U-BOLTS | FASTENERS | ADDITIONAL PRODUCTS

CHANNEL NUTS (CONTINUED)

STUD NUTS					FINISH (OPTIONS	
PART NUMBER	SIZE	THICKNESS	вох оту	EG	HD	SS6	AL
SN141	1/4"	1"	100	*	*	*	*
SN14114	1/4"	1 1/4"	100	*	*	*	*
SN14112	1/4"	1 1/2"	100	*	*	*	*
SN142	1/4"	2"	100	*	*	*	*
SN381	3/8"	1"	100	*	*	*	*
SN38114	3/8"	1 1/4"	100	*	*	*	*
SN38112	3/8"	1 1/2"	100	*	*	*	*
SN382	3/8"	2"	100	*	*	*	*
SN121	1/2"	1"	100	*	*	*	*
SN12114	1/2"	1 1/4"	100	*	*	*	*
SN12112	1/2"	1 1/2"	100	*	*	*	*
SN122	1/2"	2"	100	*	*	*	*



STUD NUTSChannel Compatibility: 132, 134, 142

TOP GRIP NUTS					FINISH	OPTIONS	
PART NUMBER	SIZE	THICKNESS	вох оту	EG	HD	SS6	AL
TG14	1/4"	1/4"	100	SS	*	*	*
TG516	5/16"	3/8"	100	*	*	*	*
TG38	3/8"	3/8"	100	SS	*	*	*
TG12	1/2"	3/8"	100	*	*	*	*



TOP GRIP NUTSChannel Compatibility: ALL

CONE NUTS			FINISH ()PTIONS
PART NUMBER	SIZE	вох оту	EG	SS6
CM10038	3/8"	100	SS	*
CM10014	1/4"	100	SS	*
CM10012	1/2"		SS	*



CONE NUTSChannel Compatibility: ALL

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel SS6: Stainless Steel 316 AL: Aluminum

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

 $\label{eq:Spec_sheets} \textbf{Spec sheets are available on request.}$

POST BASES

Post Bases are designed to fit with all 1-5/8" wide channels, single or double. Post Bases are manufactured from 1/4" thick carbon steel and have holes 9/16" diameter and are spaced 1-7/8" on center and 13/16" from the end.

POST BASES						FINISH (OPTIONS		
PART NUMBER	SIZE	HOLE	DESCRIPTION	EG	HD	SS4	SS6	GD	FG
280FL	8" x 3 1/8"	2	Single Channel - Flush Mount	SS	*	*	*	*	N/A
3013	6" x 6"	1	Single Channel - 45 Degree Angled	*	*	*	*	*	N/A
3013SQ	6" x 6"	1	Single Channel - Square	*	*	*	*	*	N/A
3033	6" x 6"	2	Single Channel - 45 Degree Angled	SS	*	*	*	*	N/A
3033SQ	6" x 6"	2	Single Channel - Square	SS	SS	SS	SS	SS	N/A
3040	5" x 5"	2	Single Channel - Two Sided	*	*	*	*	*	N/A
3025	6" x 4"	2	Single Channel - Centered	SS	*	SS	*	*	N/A
3025FL	6" x 4"	2	Single Channel - Flush Mount	SS	*	SS	*	*	N/A
3029	6" x 6"	1	Double Channel - 45 Degree Angled	*	*	*	*	*	N/A
3064	6" x 6"	2	Double Channel - 45 Degree Angled	*	SS	*	*	*	N/A
3064SQ	6" x 6"	2	Double Channel - Square	*	SS	SS	*	*	N/A
3064FL	8" x 3 1/8"	2	Double Channel - Flush Mount	*	*	*	*	*	N/A
20PU5853	5" x 5"	2	Single Channel - Square	N/A	N/A	N/A	N/A	N/A	SS

FINISH OPTIONS


EG: Electro Galvanized HD: Hot Dipped Galvanized Steel SS4: Stainless Steel 304 SS6: Stainless Steel 316 AL: Aluminum GD: Gold-Zinc Trivalent Chromium


FG: Fiberglass


AVAILABILITY


SS: Standard stocking item. *: Please contact us for availability. Please contact us for any other specialty combinations.

Spec sheets are available on request.











6 Holes

280FLEG SINGLE CHANNEL


Flush Mount — 2 Holes






3013 **SINGLE CHANNEL**

45 Degree Angled - 1 Hole



3033 **SINGLE CHANNEL** 45 Degree Angled - 2 Holes



Square - 1 Hole


SINGLE CHANNEL

301350

FASTENERS


ADDITIONAL PRODUCTS


POST BASES (CONTINUED)




3033SQ SINGLE CHANNEL

Square - 2 Holes










3025 SINGLE CHANNEL

Centered









3029
DOUBLE CHANNEL


45 Degree Angled - 1 Hole






3064SQ DOUBLE CHANNEL


Square - 2 Holes






3040 SINGLE CHANNEL

Two Sided



3025FL SINGLE CHANNEL

Flush Mount




4 Holes 79/16" Dia

7/16" Dia.


0

0 0





3064 DOUBLE CHANNEL

45 Degree Angled – 2 Holes




8 Holes






3064FL DOUBLE CHANNEL

Square – 2 Holes






20PU5853 SINGLE CHANNEL

Square - 2 Holes


FLAT FITTINGS

SQUARE WAS	HER					F	INISH	OPTION	S	
PART NUM- BER	DIMENSIONS	THICKNESS	BOLT SIZE	HOLE SIZE	EG	вк	НО	SS4	SS6	AL
61914	1-5/8" x 1-5/8"	1/4"	1/4"	11/32"	SS	*	SS	SS	SS	*
61938	1-5/8" x 1-5/8"	1/4"	3/8"	7/16"	SS	*	SS	SS	SS	*
61912	1-5/8" x 1-5/8"	1/4"	1/2"	9/16"	SS	*	SS	SS	SS	*
61958	1-5/8" x 1-5/8"	1/4"	5/8"	11/16"	SS	*	*	*	*	*
61934	1-5/8" x 1-5/8"	1/4"	3/4"	13/16"	SS	*	*	*	*	*
62038	2" x 2"	1/8"	3/8"	7/16"	SS	*	*	*	*	*
62012	2" x 2"	1/8"	1/2"	9/16"	SS	*	*	*	*	*
620B38	3" x 3"	1/4"	3/8"	7/16"	SS	*	*	*	*	*
620B12	3" x 3"	1/4"	1/2"	9/16"	SS	*	*	*	*	*
620B58EG	3" x 3"	1/4"	5/8"	11/16"	SS	*	*	*	*	*
345812	2" x 2"	1/4"	1/2"	9/16"	SS	*	*	*	*	*
345858	2" x 2"	1/4"	5/8"	11/16"	*	*	*	*	*	*
345834	2" x 2"	1/4"	3/4"	13/16"	*	*	*	*	*	*



SQUARE WASHER

GUIDED SQ	UARE WASHER					F	INISH (OPTION	S	
PART NUMBER	DIMENSIONS	THICKNESS	BOLT SIZE	HOLE SIZE	EG	вк	НО	SS4	SS6	AL
250414	1-5/8" x 1-5/8"	1/4"	1/4"	11/32"	*	*	*	*	*	*
250438	1-5/8" x 1-5/8"	1/4"	3/8"	7/16"	SS	*	*	*	*	*
250412	1-5/8" x 1-5/8"	1/4"	1/2"	9/16"	SS	*	*	*	*	*



GUIDED SQUARE WASHER



617 **SWIVEL PLATE** 3 Holes



618 **SWIVEL PLATE** 2 Holes

SWIVEL PLA	TE						FIN	ISH OPTI	ONS	
PART NUMBER	DIMENSIONS	HOLES	HOLE SIZE	HOLE SPACING - FROM END	HOLE SPACING - ON-CENTER	EG	но	GR	SS4	SS6
617	7 1/8" x 3 5/8"	3	9/16"	13/16"	1 7/8"	*	*	*	*	*
618	5 1/4" x 3 5/8"	2	9/16"	13/16"	1 7/8"	*	*	*	*	*

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel SS4: Stainless Steel 304 SS6: Stainless Steel 316 AL: Aluminum GD: Gold-Zinc Trivalent Chromium

BK: Plain Steel GR: Green

SS: Standard stocking item. *: Please contact us for availability. In addition to the offerings illustrated, hundreds of other fittings are available for specific applications. Spec sheets are available on request.

U-BOLTS


FASTENERS

ADDITIONAL PRODUCTS


FLAT FITTINGS (CONTINUED)



TEE PLATE	EE PLATE								FINISH OPTIONS						
PART NUMBER	DIMENSIONS	HOLES	HOLE SIZE	HOLE SPACING - FROM END	HOLE SPACING - ON-CENTER	EG	HD	GR	GD	SS4	SS6	AL			
714	3 1/2" x 5 3/8" x 1 5/8"	4	9/16"	13/16"	1 7/8"	SS	SS	*	SS	SS	SS	*			



718 **L PLATE** 3 Holes



7184 **L PLATE**

4 Holes

L PLATE	PLATE								FINISH OPTIONS					
PART NUMBER	DIMENSIONS	HOLES	HOLE SIZE	HOLE SPACING - FROM END	HOLE SPACING - ON-CENTER	EG	HD	GR	GD	SS4	SS6	AL		
718	3 1/2" x 3 1/2" x 1 5/8"	3	9/16"	13/16"	1 7/8"	SS	SS	*	SS	SS	*	*		
7184	3 1/2" x 5 3/8" x 1 5/8"	4	9/16"	13/16"	1 7/8"	SS	SS	*	*	SS	*	*		



CROSS PLA	ATE					FINISH OPTIONS						
PART NUMBER	DIMENSIONS	HOLES	HOLE SIZE	HOLE SPACING - FROM END	HOLE SPACING - ON-CENTER	EG	HD	GR	SS4	SS6	AL	
712	5 3/8" x 5 3/8" x 1 5/8"	5	9/16"	13/16"	1 7/8"	SS	SS	*	*	SS	*	

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel


\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316 **AL:** Aluminum

GD: Gold-Zinc Trivalent Chromium **GR:** Green


AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability. In addition to the offerings illustrated, hundreds of other fittings are available for specific applications. Spec sheets are available on request.

FLAT FITTINGS (CONTINUED)




744 FLAT PLATE **CORNER FITTING**



750 **FLAT PLATE CORNER FITTING**

4 Holes


FLAT PLAT	FLAT PLATE CORNER FITTING							FINISH OPTIONS							
PART NUMBER	DIMENSIONS	HOLES	ES HOLE HOLE SPACING - HOLE SPACING - SIZE FROM END ON-CENTER		EG	НО	GR	GD	SS4	SS6	AL				
744	3 1/2" x 3 1/2"	3	9/16"	13/16"	1 7/8"	*	*	*	*	*	*	*			
750	5 3/8" x 3 1/2"	4	9/16"	13/16"	1 7/8"	SS	SS	*	*	SS	*	*			
2190	5 3/8" x 5 3/8"	5	9/16"	13/16"	1 7/8"	SS	*	*	*	*	*	*			



747 **FLAT PLATE TEE FITTING** 4 Holes




854 **FLAT PLATE TEE FITTING** 5 Holes



925 **FLAT PLATE TEE FITTING** 3 Holes


FLAT PLAT	FLAT PLATE TEE FITTING							FINISH OPTIONS							
PART NUMBER			HOLE SPACING - ON-CENTER	EG	НО	GR	GD	SS4	SS6	AL					
747	5 3/8" x 3 1/2"	4	9/16"	13/16"	1 7/8"	SS	*	*	*	*	*	*			
854	5 3/8" x 5 3/8"	5	9/16"	13/16"	1 7/8"	SS	SS	*	*	*	SS	*			
925	3 1/2" x 3 1/2"	3	9/16"	13/16"	1 7/8"	*	*	*	*	*	*	*			

FLAT PLAT	E FITTING		FINISH OPTIONS							
PART NUMBER	HOLES	DIMENSIONS	BOLT SIZE	EG	HD	GD	SS4	SS6	AL	
601	2	3 1/2" x 1 5/8"	9/16"	SS	*	*	*	SS	*	
602	3	5 3/8" x 1 5/8"	9/16"	*	*	*	*	*	*	
888	4	7 1/4" x 1 5/8"	9/16"	SS	SS	*	SS	SS	*	
8885	5	9 1/8" x 1 5/8"	9/16"	*	*	*	*	*	*	



601 **FLAT PLATE FITTING**

2 Holes



FLAT PLATE FITTING

3 Holes


FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel **\$\$4:** Stainless Steel 304 **\$\$6:** Stainless Steel 316 **AL:** Aluminum


GD: Gold-Zinc Trivalent Chromium GR: Green

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. Weights are for EG finish, weights for other finishes may vary. In addition to the offerings illustrated, hundreds of other fittings are available for specific applications. Spec sheets are available on request.



888 **FLAT PLATE FITTING** 4 Holes




8885 **FLAT PLATE FITTING** 5 Holes

ANGLE FITTINGS

90 DEGRE	E							F	INISH	OPTIO	NS			
PART NUMBER	HOLES	DIMENSIONS	WIDTH	HOLE SIZE	HOLE SPACING -FROM END	HOLE SPACING -FROM CORNER	HOLE SPACING -ON-CENTER	EG	HD	SS4	SS6	GD	AL	GR
603	2	1 7/8" x 2"	1 5/8"	9/16"	13/16"		1 7/8"	SS	SS	SS	SS	SS	*	*
604	2	1 5/8" x 2 1/4"	1 5/8"	9/16"	13/16"		1 7/8"	SS	*	SS	*	*	*	*
605	3	2 1/4" x 3 1/2"	1 5/8"	9/16"	13/16"		1 7/8"	SS	*	*	SS	*	*	*
606	3	1 5/8" x 4 1/8"	1 5/8"	9/16"	13/16"	1 7/16"	1 7/8"	SS	*	*	SS	*	*	*
607	4	3 1/2" x 4 1/8"	1 5/8"	9/16"	13/16"	1 7/16"	1 7/8"	SS	SS	SS	SS	SS	SS	*
615	5	4 1/8" x 3 1/2" x 3 1/2"	1 5/8"	9/16"	13/16"		1 7/8"	*	*	*	*	*	*	*
660	4	3 7/8" x 3 13/16"	1 5/8"	9/16"	13/16"	1 1/2"	1 7/8"	SS	SS	*	*	*	*	*
745	3	3 7/8" x 1 7/8"	1 5/8"	9/16"	13/16"		1 7/8"	SS	*	SS	*	*	*	*
746	3	2 1/4" x 1 5/8" x 3 1/2"	1 5/8"	9/16"	13/16"		1 7/8"	*	*	*	*	*	*	*
748	4	4 1/8" x 3 1/2" x 1 5/8"	1 5/8"	9/16"	13/16"		1 7/8"	SS	*	*	*	*	*	*
752R	4	3 1/2" x 4 1/8"	1 5/8"	9/16"	13/16"		1 7/8"	SS	*	*	*	*	*	*
752L	4	3 1/2" x 4 1/8"	1 5/8"	9/16"	13/16"		1 7/8"	SS	*	*	*	*	*	*
806	2	2 1/8" x 2 1/8"	1 5/8"	9/16"	13/16"		1 7/8"	*	*	*	*	*	*	*
2520	1 hole, 1 1-1/2" slot	2" x 2 5/8"	1 5/8"	9/16"	13/16"	1 5/16"	1 7/8"	SS	*	*	*	*	*	*
3373	7	4" x 4"	1 5/8"	9/16"	13/16"		1 7/8"	SS	SS	SS	*	*	*	*



















606









FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **\$\$4:** Stainless Steel 304 **\$\$6:** Stainless Steel 316 **AL:** Aluminum **GD:** Gold-Zinc Trivalent Chromium GR: Green

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. In addition to the offerings illustrated, hundreds of other fittings are available for specific applications. Spec sheets are available on request. ADDITIONAL PRODUCTS

ANGLE FITTINGS (CONTINUED)

ANGLE FIT	TINGS							FINISH OPTIONS					
PART NUMBER	HOLES	ANGLE DEGREE	LENGTH	LENGTH	HOLE SIZE	WIDTH	HOLE SPACING - ON-CENTER	EG	НО	SS4	SS6	GR	GD
62430	2	30		2 1/2"	9/16"	1 5/8"	1 7/8"	*	*	*	*	*	*
62445	2	45	3 1/8"	2 1/2"	9/16"	1 5/8"	1 7/8"	SS	*	*	*	*	*
62460	2	60	3 1/8"	2 1/2"	9/16"	1 5/8"	1 7/8"	*	*	*	*	*	*
63330	2	30	3 1/4"	2 1/16"	9/16"	1 5/8"	1 1/16"	*	*	*	*	*	*
63345	2	45	3"	2 5/16"	9/16"	1 5/8"	1 1/16"	SS	*	*	SS	*	*
63360	2	60	3 3/8"	1 7/8"	9/16"	1 5/8"	1 1/16"	*	*	*	*	*	*
78130	4	30	3 11/16"	3 1/2"	9/16"	1 5/8"	1 7/8"	SS	*	*	*	*	*
78145	4	45	3 11/16"	3 1/2"	9/16"	1 5/8"	1 7/8"	SS	SS	SS	*	*	*
78160	4	60	3 11/16"	3 1/2"	9/16"	1 5/8"	1 7/8"	*	*	*	*	*	*
79330	4	30		4 3/8"	9/16"	1 5/8"	1 7/8"	*	*	*	*	*	*
79345	4	45	4 15/16"	4 3/8"	9/16"	1 5/8"	1 7/8"	SS	*	SS	*	*	*
79360	4	60	5"	4 3/8"	9/16"	1 5/8"	1 7/8"	*	*	*	*	*	*







633XX
ANGLE FITTINGS



781XX
ANGLE FITTINGS



793XX ANGLE FITTINGS

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel

\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316 **AL:** Aluminum

GD: Gold-Zinc Trivalent Chromium **GR:** Green

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.

Additional angles are available. Please contact your sales representative for details. Spec sheets are available on request.

ANGLE FITTINGS (CONTINUED)

ANGLE FITTINGS - H	IINGED			FINISH OPTIONS						
PART NUMBER	HOLES	DIMENSIONS	BOLT SIZE	EG	HD	SS4	SS6			
940212	2	6" x 1 5/8"	1/2"	SS	*	*	*			
940234	2	6" x 1 5/8"	3/4"	*	*	*	*			
940258	2	6" x 1 5/8"	5/8"	*	*	*	*			
940312	3	7 7/8" x 1 5/8"	1/2"	SS	*	*	*			
940334	3	7 7/8" x 1 5/8"	3/4"	*	*	*	*			
940358	3	7 7/8" x 1 5/8"	5/8"	*	*	*	*			
940412	4	9 3/4" x 1 5/8"	1/2"	SS	*	*	*			

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **\$\$4:** Stainless Steel 304 **\$\$6:** Stainless Steel 316

AVAILABILITY


SS: Standard stocking item. *: Please contact us for availability.

Additional angles are available. Please contact your sales representative for details. Spec sheets are available on request.

ANGLE FITTINGS - HINGED

The edges of hinged fittings are designed to provide an alignment guide for 0, 45 and 90 degree installation as shown in the drawings below. This eliminates the need for measuring gages.

The fittings are hinged with a Grade 5 bolt and nylon insert locknut for superior strength and to prevent loosening of the hinge.



HINGE CONNECT OR AUTO-ALIGNMENT GUIDES


The unique edges of the two hinges have been designed to provide an alignment guide for 0° , 45° and 90° as shown in the drawings below.

This eliminates the need for measuring gages.

- Each half of the hinge is formed and welded for maximum strength.
- Hinged with Grade 5 bolt for superior strength.
- The nylon insert locknut prevents loosening of the hinge.


WING FITTINGS

WING FITTINGS					FINISH OPTIONS							
PART NUMBER	HOLES	DIMENSIONS	BOLT SIZE	DIRECTION	EG	HD	AL	GR	SS4	SS6	ВК	
665	4	2" x 1 7/8"	9/16"		*	*	*	*	*	*	*	
667	8	3 7/8" x 3 3/4"	9/16"		SS	*	*	*	*	*	*	
668	6	2" x 5 13/32"	9/16"		SS	*	*	*	*	*	*	
669	12	3 7/8" x 9 5/32"	9/16"		*	*	*	*	*	*	*	
670	9	3 7/8" x 5 13/32"	9/16"		SS	*	*	*	*	*	*	
720R	3	2" x 3 1/2"	9/16"	Right	SS	*	*	*	*	*	*	
720L	3	2" x 3 1/2"	9/16"	Left	SS	*	*	*	*	*	*	
821	8	3 7/8" x 5 13/32"	9/16"		SS	*	*	*	*	*	*	
913	10	3 7/8"x 9 5/32"	9/16"		*	*	*	*	*	*	*	
923	5	2" x 5 13/32"	9/16"		SS	*	*	*	*	*	*	
2128R	6	3 1/2" x 3 3/4"	9/16"	Right	SS	*	*	*	*	*	*	
2128L	6	3 1/2" x 3 3/4"	9/16"	Left	SS	*	*	*	*	*	*	
2129R	4	3 3/4" x 3 7/8"	9/16"	Right	SS	*	*	*	*	*	*	
2129L	4	3 3/4" x 3 7/8"	9/16"	Left	SS	*	*	*	*	*	*	
2514	8	3 3/4" x 3 3/4"	9/16"		SS	*	*	*	*	*	*	




WING FITTINGS

4 Holes




667 WING FITTINGS

8 Holes




WING FITTINGS

6 Holes



669 WING FITTINGS

12 Holes




670 WING FITTINGS

9 Holes




821 WING FITTINGS

8 Holes




913 WING FITTINGS

10 Holes



923 WING FITTINGS

5 Holes



2128

WING FITTINGS

6 Holes

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **SS4:** Stainless Steel 304 **SS6:** Stainless Steel 316 **AL:** Aluminum

GR: Green **BK:** Plain Steel

AVAILABILITY


\$\$: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other fittings are available for specific applications.

Spec sheets are available on request.


Z FITTINGS

Z FITTINGS			FINISH OPTIONS								
PART NUMBER	HOLES	DIMENSIONS	BOLT SIZE	EG	HD	AL	GR	SS4	SS6		
611	3	2 1/8" x 1 5/8"	9/16"	SS	*	*	*	*	*		
756	3	17/8" x 3 1/4"	9/16"	SS	*	*	*	*	*		
928	2	3 3/4" x 13/16"	9/16"	*	*	*	*	*	*		






3 Holes



756 Z FITTINGS

3 Holes



928

Z FITTINGS

2 Holes

FINISH OPTIONS

EG: Electro Galvanized
 HD: Hot Dipped Galvanized Steel
 S4: Stainless Steel 304
 S5: Stainless Steel 316
 AL: Aluminum
 GR: Green

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.


In addition to the offerings illustrated, hundreds of other fittings are available for specific applications. Spec sheets are available on request.

MADE IN THE USA

We can source domestically produced products to meet your Made in the USA needs. Contact your sales representative for details.


U FITTINGS

U FITTINGS					FINISH OPTIONS								
PART NUMBER	HOLES	CHANNEL DEPTH (A)	DIMENSIONS	BOLT SIZE	EG	но	AL	GR	SS4	SS6	GD		
613	5	1 5/8"	5 3/8"	9/16"	SS	*	*	SS	SS	*	*		
616	4	1 5/8"	7 1/4"	9/16"	SS	SS	*	*	SS	*	SS		
631	2	1 5/8"	3 1/2"	9/16"	*	*	*	*	*	*	*		
644	2	13/16"	3 1/2"	9/16"	*	*	*	*	*	*	*		
649	Electrical joiner	1 5/8"	6 3/4"	9/16"	*	*	*	*	*	*	*		
678	3	4 7/8"		9/16"	SS	*	*	*	*	*	*		
679	3	3 1/4"	5 3/8"	9/16"	SS	SS	*	*	*	*	*		
616112	4	3 1/4"	7 1/4"	9/16"	*	SS	*	*	*	SS	*		
704	2 slots	1 5/8"	8"	9/16"	*	*	*	*	*	*	*		
721	6	3 1/4"	7"	9/16"	SS	*	*	*	*	*	*		
733	6	1 5/8"	9/16"	9/16"	SS	*	*	*	*	*	*		
929	3	13/16"	5 3/8"	9/16"	*	*	*	*	*	*	*		
2648	3	2 7/16"	5 3/8"	9/16"	*	*	*	*	*	*	*		






5 Holes




616 & 616112 U FITTINGS

4 Holes




631 U FITTINGS

2 Holes




644 U FITTINGS

2 Holes



649 U FITTINGS

Electrical Joiner




679 U FITTINGS

3 Holes




704 U FITTINGS

2 Slots




721 U FITTINGS

6 Holes



929 U FITTINGS

3 Holes



2648 U FITTINGS

3 Holes

FINISH OPTIONS

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other fittings are available for specific applications. Spec sheets are available on request.


U FITTINGS (CONTINUED)

ALUMINUM JOINEI	RS		FINISH OPTIONS		
PART NUMBER	HOLES	HOLES CHANNEL DEPTH		EG	AL
766132	2	1 5/8"	132	SS	*
767132	2	1 5/8"	132	N/A	SS
768132	3	1 5/8"	132	N/A	*
769132	4	1 5/8"	132	N/A	*




766132 ALUMINUM JOINER

2 Holes



767132 ALUMINUM JOINER

2 Holes



768132 ALUMINUM JOINER

3 Holes



769132

ALUMINUM JOINER

4 Holes

FINISH OPTIONS

EG: Electro Galvanized AL: Aluminum

AVAILABILITY

\$\$: Standard stocking item. *: Please contact us for availability.

AL - Cast Aluminum with Jam Screws


In addition to the offerings illustrated, hundreds of other fittings are available for specific applications.

TROLLEYS

TROLLEYS	TROLLEYS							
PART NUMBER	DESCRIPTION	WHEELS	HOLES	HOLE DIMENSION	CHANNEL SIZE	EG	SS4	
2521		2	1	9/16"	132, 134	*	*	
2522		4	3	9/16"	132, 134	SS	*	
2524	Light Duty	2	N/A	N/A	132, 134	*	*	
2525	Light Duty	4	1, 2 slots	9/32"	132, 134	SS	*	




2521 **TROLLEY** 2 Wheels



2522 **TROLLEY** 4 Wheels



2524 **TROLLEY** 2 Wheels



2525 **TROLLEY** 4 Wheels

FINISH OPTIONS

EG: Electro Galvanized AL: Aluminum

AVAILABILITY


SS: Standard stocking item. *: Please contact us for availability.

Wheels have stainless steel ball bearings. Trolleys with nylon wheels are available, please call for details.

TROLLEY SUPPORTS	TROLLEY SUPPORTS						
PART NUMBER	DESCRIPTION	HOLES	HOLE DIMENSION	CHANNEL SIZE	EG	НО	GR
2528	3 3/4" x 1 5/8"	1, 2	9/16", 7/16"	132, 134	*	*	*
25281	3 3/4" x 3 1/2'	1, 2	9/16", 7/16"	132, 134	*	*	*



2528 **TROLLEY SUPPORTS**



25281 **TRACK HANGER AND JOINER**

FINISH OPTIONS EG: Electro Galvanized

AL: Aluminum

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.


In addition to the offerings illustrated, hundreds of other Brackets are available for specific applications.

FASTENERS

ADDITIONAL PRODUCTS

BRACKETS

REVERSIBLE CHA	FINISH OPTIONS								
PART NUMBER	DIMENSIONS	HOLES	HOLE SIZE	SLOT DIRECTION	EG	HD	SS4	SS6	AL
6516	6" 4 5/8" x 2"	2	9/16"	Up	*	*	*	*	*
65112	12" 4 5/8" x 2"	2	9/16"	Up	SS	SS	SS	*	*
65118	18" 4 5/8" x 2"	2	9/16"	Up	SS	*	*	*	*
65124	24" 4 5/8" x 2"	2	9/16"	Up	SS	SS	SS	*	*




REVERSIBLE CHANNEL BRACKETS


WRAP AROUND B	RACKETS				FINISH OPTIONS		
PART NUMBER	DIMENSIONS	DIMENSIONS HOLES HOLE SIZE SLOT DIRECTION		EG	HD	GR	
6616T1	6" x 3 1/2"	1	9/16"	Up	*	*	*
66112T1	12" x 3 1/2"	1	9/16"	Up	*	*	*
66118T1	18" x 5 3/8""	1	9/16"	Up	*	*	*
66124T1	24" x 5 3/8""	1	9/16"	Up	*	*	*
6616T2	6" x 3 1/2"	1	9/16"	Down	*	*	*
66112T2	12" x 3 1/2"	1	9/16"	Down	*	*	*
66118T2	18" x 5 3/8""	1	9/16"	Down	*	*	*
66124T2	24" x 5 3/8""	1	9/16"	Down	*	*	*



WRAP AROUND BRACKETS


TELESCOPING BR	FINIS	SH OPT	IONS		
PART NUMBER	DIMENSIONS	HOLE SIZE	EG	HD	SS4
708	5 7/8" x 4 3/4"	9/16"	*	*	*
3164	7 1/2" x 4 3/4"	9/16"	SS	*	*





TELESCOPING BRACKETS

SHELF BRACKETS	;				FINISH OPTIONS		
PART NUMBER	A	В	HOLES	HOLE SIZE	EG	HD	SS4
73208	8 1/2"	4"	2	9/16"	SS	*	*
73210	10 1/2"	4"	3	9/16"	*	*	*
73212	12 1/2"	6"	4	9/16"	SS	*	*
73214	14 1/2"	6"	4	9/16"	*	*	*
73216	16 1/2"	6"	4	9/16"	*	*	*
73218	18 1/2"	6"	4	9/16"	*	*	*
73220	20 1/2"	6"	4	9/16"	*	*	*





FINISH OPTIONS

EG: Electro Galvanized

HD: Hot Dipped Galvanized Steel

GD: Gold-Zinc Trivalent Chromium


AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other Brackets are available for specific applications.


BRACKETS (CONTINUED)

INTERLOCKING C	HANNEI	BRACKETS				FINISH OPTIONS		
PART NUMBER	A	DIMENSIONS	HOLES	HOLE SIZE	SLOT DIRECTION	EG	HD	SS4
8086T1	6"	3 3/4"	1	9/16"	Up	*	*	*
80812T1	12"	3 3/4"	1	9/16"	Up	*	*	*
80818T1	18"	3 3/4"	1	9/16"	Up	*	*	*
80824T1	24"	3 3/4"	1	9/16"	Up	*	*	*
8086T2	6"	3 3/4"	1	9/16"	Down	*	*	*
80812T2	12"	3 3/4"	1	9/16"	Down	*	*	*
80818T2	18"	3 3/4"	1	9/16"	Down	*	*	*
80824T2	24"	3 3/4"	1	9/16"	Down	*	*	*



INTERLOCKING CHANNEL BRACKETS

DOUBLE CHANNE	L BRACK	(ETS				FINI	SH OPT	IONS
PART NUMBER	A	DIMENSIONS	HOLES	HOLE SIZE	SLOT DIRECTION	EG	HD	SS4
80912	12"	6 1/4" x 2"	2	9/16"	Up & Down	SS	SS	*
80918	18"	6 1/4" x 2"	2	9/16"	Up & Down	*	*	*
80924	24"	6 1/4" x 2"	2	9/16"	Up & Down	SS	SS	SS
80930	30"	6 1/4" x 2"	2	9/16"	Up & Down	*	*	*
80936	36"	6 1/4" x 2"	2	9/16"	Up & Down	*	SS	*



DOUBLE CHANNEL BRACKETS

TUBULAR KNEE BR	ACE		FINISH OPTIONS		
PART NUMBER	A	HOLES	HOLE SIZE	EG	
81212	12"	2	17/32"	SS	
81218	18"	2	17/32"	SS	
81224	24"	2	17/32"	*	
81230	30"	2	17/32"	*	
81236	36"	2	17/32"	*	



KNEE BRACE

FINISH OPTIONS


EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **GD:** Gold-Zinc Trivalent Chromium

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. In addition to the offerings illustrated, hundreds of other Brackets are available for specific applications.


BRACKETS (CONTINUED)

SHELF BRACKET	rs						FINISH OPTIONS
PART NUMBER	A	В	HOLES	HOLE SIZE	RIGHT	LEFT	EG
8386	6"	1 15/16"	1	7/16"	R	L	*
8388	8"	2 7/16"	1	7/16"	R	L	*
83810	10"	2 15/16"	1	7/16"	R	L	*
83812	12"	3 7/16"	1	7/16"	R	L	*
83814	14"	3 15/16"	1	7/16"	R	L	*
83816	16"	4 7/16"	1	7/16"	R	L	*
83818	18"	4 15/16"	1	7/16"	R	L	*
83820	20"	5 7/16"	1	7/16"	R	L	*
83822	22"	5 15/16"	1	7/16"	R	L	*
83824	24"	6 7/16"	1	7/16"	R	L	*
83826	26"	6 15/16"	1	7/16"	R	L	*
83828	28"	7 7/16"	1	7/16"	R	L	*
83830	30"	7 15/16"	1	7/16"	R	L	*




SHELF BRACKETS


CABLE TRAY BR	ACKET				FINISH OPTIONS		
PART NUMBER	A	В	HOLES	HOLE SIZE	EG	HD	SS4
328212	12"	8 3/4"	2	9/16"	*	*	*
328218	18"	8 3/4"	2	9/16"	SS	*	*
328224	24"	8 3/4"	2	9/16"	*	*	*
328230	30"	11 1/4"	2	9/16"	*	*	*
328236	36"	11 1/4"	2	9/16"	*	*	*



STRUT BRACE					NISH OPTIO	NS
PART NUMBER	A	HOLES	HOLE SIZE	EG	HD	SS4
92612	12"	2	9/16"	SS	*	*
92618	18"	2	9/16"	SS	*	*
92624	24"	2	9/16"	SS	*	*



ADJUSTABLE BRACE					OPTIONS	
PART NUMBER	ТҮРЕ	CHANNEL DEPTH	EG	НО	SS4	SS6
9400	Single	1 5/8" x 1 5/8"	SS	*	*	SS
9401	Double	1 5/8" x 1 5/8"	SS	*	*	*



FINISH OPTIONS

EG: Electro Galvanized

HD: Hot Dipped Galvanized Steel


GD: Gold-Zinc Trivalent Chromium

AVAILABILITY


SS: Standard stocking item. *: Please contact us for availability.

In addition to the offerings illustrated, hundreds of other Brackets are available for specific applications.

OTHER FITTINGS




2632 SWING GATE CHANNEL HANGER




26320 SWING GATE CHANNEL HANGER

SWING GATE CHAN	NEL HANGER		FINISH OPTIONS
PART NUMBER	SIZE	SQUARE HOLE	EG
2632	2 3/4"	9/32"	*
26320	5"	9/32"	SS



REEL RACK



REEL RACK

REEL RACK - SINGLE AXE	FINISH OPTIONS		
PART NUMBER	SIZE	EG	НО
825R	5 3/8" x 3"	SS	*
825L	5 3/8" x 3"	SS	*
826	3" x 7 5/8"	*	*

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **SS4:** Stainless Steel 304 **SS6:** Stainless Steel 316

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other fittings are available for specific applications.

U-BOLTS

FASTENERS

ADDITIONAL PRODUCTS

OTHER FITTINGS (CONTINUED)

FLOOR FLANGE PLA	ATES	FINISH (OPTIONS
PART NUMBER	Size	EG	SS4
FF12	1/2"	*	*
FF34	3/4"	SS	*
FF1	1"	*	*
FF114	1 1/4"	*	*
FF112	1 1/2"	*	*
FF2	2"	*	*



FLOOR FLANGE PLATE

CUSTOM FABRICATION

Contact your sales representative with your custom fabrication needs. We work with partners who can fabricate to your customer's specifications.

FINISH OPTIONS

EG: Electro Galvanized **SS4:** Stainless Steel 304

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

In addition to the offerings illustrated, hundreds of other fittings are available for specific applications.


BEAM CLAMPS

Channel to I beams, and other structural beam supports. PUPCO offers an array of beam clamp styles and sizes to meet your requirements.

BEAM CLAMPS




I-BEAM CLAMP	I-BEAM CLAMP					NISH OPTIO	NS
PART NUMBER	THICKNESS	CHANNEL DEPTH	USE IN PAIRS	LOAD	EG	SS4	SS6
684	3/8"	1 5/8"	Х	900 lbs	*	*	*




Z BEAM CLAMP

Z BEAM CLAMP					FINISH (OPTIONS
PART NUMBER	THICKNESS	SET SCREW	USE IN PAIRS	LOAD	EG	SS4
685	3/8"	cup point	Х	450 lbs	*	*



686 HOLD DOWN BEAM CLAMP, NOTCHED

HOLO DOWN BEA	M CLAMP, NOT	CHED				
PART NUMBER	SIZE	USE IN PAIRS	EG	НО	SS4	SS6
686	2 1/8"	Х	SS	*	*	*



855 PIERCED-ANGLE/WINDOW TYPE BEAM CAMP

FINISH OPTIONS

EG: Electro Galvanized

HD: Hot Dipped Galvanized Steel

GD: Gold-Zinc Trivalent Chromium **SS4:** Stainless Steel 304

SS6: Stainless Steel 316

BK: Plain Steel

AVAILABILITY

 $\textbf{SS:} \ \textbf{Standard stocking item}.$

*: Please contact us for availability.

Please contact us for any other specialty combinations.

Spec sheets are available on request.

PIERCED-ANGLE / W	IGLE / WINDOW TYPE BEAM CAMP			FINISH OPTIONS				
PART NUMBER	SIZE	CHANNEL DEPTH	USE IN PAIRS	EG	AL	HD	SS4	SS6
855	3 1/2"	1 5/8"	Х	SS	*	*	*	*

BEAM CLAMPS (CONTINUED)



907 I-BEAM CLAMP



998 I-BEAM CLAMP

I-BEAM CLAMP					FIN	IISH OPTIC	INS	
PART NUMBER	THICKNESS	SET SCREW	USE IN PAIRS	EG	HD	вк	SS4	SS6
907	1/4"	3/8"	Х	*	*	*	*	*
998	3/8"	1/2"	Х	*	*	*	*	*



916 HEAVY DUTY BEAM CLAMP

HEAVY DUTY BE	AM CLAMP				FINISH OPTIONS
PART NUMBER	THICKNESS	THROAT OPENING	USE IN PAIRS	LOAD	EG
916	3/8"	to 2"	Х	900 lbs	SS



MALLEABLE IRON C-CLAMP WITH SET SCREW

MALLEABLE IRO	FINISH OPTIONS				
PART NUMBER	ROD SIZE	THROAT OPENING	EG	SS4	SS6
10114	1/4"	3/4"	SS	*	SS
10138	3/8"	1"	SS	*	SS
10112	1/2"	1"	SS	*	SS

FINISH OPTIONS

EG: Electro Galvanized **SS4:** Stainless Steel 304

SS6: Stainless Steel 316

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.

 $\label{lem:please contact} Please \ contact \ us \ for \ any \ other \ specialty \ combinations. \ \textbf{Spec sheets are available on request.}$

PIPE CLAMPS PIPE HANGERS ADDITIONAL PRODUCTS

BEAM CLAMPS (CONTINUED)



FLAT PRESSED STEEL C-CLAMP

FLAT PRESSED STEEL C-CLAMP			FINISH OPTIONS				
PART NUMBER	ROD SIZE	THROAT OPENING	EG	но	SS4	SS6	вк
21L38	3/8"	3/4"	SS	*	*	*	*
21L12	1/2"	3/4"	SS	*	*	*	*
21L58	5/8"	3/4"	*	*	*	*	*
21L34	3/4"	3/4"	*	*	*	*	*
21L78	7/8"	3/4"	*	*	*	*	*

MALLEABLE IRO	MALLEABLE IRON C-CLAMP				
PART NUMBER	ROD SIZE	THROAT OPENING	EG	BK	
23L38	3/8"	3/4"	*	*	
23L12	1/2"	3/4"	*	*	
23L58	5/8"	3/4"	*	*	
23L34	3/4"	3/4"	*	*	





2622 **I-BEAM CLAMP**

I-BEAM CLAMP				FINISH (OPTIONS		
PART NUMBER	J-BOLT LENGTH	FLANGE WIDTH	вох оту	EG	HD	SS4	GD
2622J6	7"	3" - 4 1/2"	25	*	*	*	*
2622J10	9"	4 1/2" - 6 1/2"	25	*	*	*	*
2622J14	13"	6 1/2" - 10 1/2"	25	*	*	*	*

INCLUDES: BEAM CLAMP, CLIP, **J-BOLT AND HEX NUT**

FINISH OPTIONS

EG: Electro Galvanized

HD: Hot Dipped Galvanized Steel SS4: Stainless Steel 304

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Please contact us for any other specialty combinations. Spec sheets are available on request.


BEAM CLAMPS (CONTINUED)



2623 **SWIVEL ADAPTER**

SWIVEL ADAPTER	FINISH I	OPTIONS		
PART NUMBER	ROD SIZE	LOAD	EG	SS4
2623*	up to 1/2"	300 lbs	*	*









2624 **WOOD BEAM HANGER**

WOOD BEAM HA	NGER	FINISH OPTIONS	
PART NUMBER	THROAT OPENING	LOAD	EG
2624	3/4"	300 lbs	*



Rod Swivel 15 All Directions



THREADED ROD **BEAM CLAMP**

THREADED ROD BE	FINISH OPTIONS				
PART NUMBER	J-BOLT LENGTH	FLANGE WIDTH	вох оту	EG	НО
2626	N/A - clamp only		25	*	*
2626J4	1/2"-13 x 8 1/2"	3" - 6"	25	*	*
2626J6	1/2"-13 x 11 1/2"	5" - 9"	25	*	*
2626J9	12"-13 x 14 1/2"	8" - 12"	25	*	*
2626J12	1/2 '-13 x 17 1/2"	11" - 15"	25	*	*

INCLUDES: **BEAM CLAMP, CHECK MARK** STYLE J-BOLT, HEX NUT

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel

\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316 **BK:** Plain Steel

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

 $\label{lem:please contact} \textbf{Please contact us for any other specialty combinations.} \textbf{Spec sheets are available on request.}$


THREADED ROD

BEAM CLAMPS (CONTINUED)



STRUT U-BOLT **BEAM CLAMP**

STRUT U-BOLT BEAM CLAMP			FINISH OPTIONS				
PART NUMBER	CHANNEL DEPTH	USE IN PAIRS	EG	HD	GD	SS4	SS6
2651-T1	1 5/8"	Х	SS	SS	*	SS	SS
2651-T2	3 1/4"	X	SS	SS	*	SS	*
2651-T8	8 1/2"	Х	SS	*	*	*	*



COLUMN **ATTACHMENT**

COLUMN ATTACHMENT			FINISH OPTIONS			
PART NUMBER	CHANNEL DEPTH	USE IN PAIRS	SLIP RATING	EG	SS4	SS6
2654	1 5/8"	Х	800 lbs	SS	*	*
2654A	13/16"	Х	800 lbs	*	*	*

FINISH OPTIONS

EG: Electro Galvanized SS4: Stainless Steel 304 SS6: Stainless Steel 316 BK: Plain Steel

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.

Please contact us for any other specialty combinations. Spec sheets are available on request.


BEAM CLAMPS (CONTINUED)



I-BEAM CLAMP WITH U-BOLT

I-BEAM CLAMP W	TH U-BOLT				FINISH	OPTIONS
PART NUMBER	J-BOLT LENGTH	U-BOLT	FLANGE WIDTH	CHANNEL DEPTH	EG	HD
2656T1	7"	3 3/8"	3" - 6"	13/16" - 1 5/8"	*	*
2656T1	9"	3 3/8"	6" - 8"	13/16" - 1 5/8"	*	*
2656T1	13"	3 3/8"	8" - 12"	13/16" - 1 5/8"	*	*
2656T2	7"	5"	3" - 6"	1 5/8" - 3 1/4"	*	*
2656T2	9"	5"	6" - 8"	1 5/8" - 3 1/4"	*	*
2656T2	13"	5"	8" - 12"	1 5/8" - 3 1/4"	SS	*
2656T3	7"	8 1/2"	3" - 6"	4 7/8" - 6 1/2"	*	*
2656T3	9"	8 1/2"	6" - 8"	4 7/8" - 6 1/2"	*	*
2656T3	13"	8 1/2"	8" - 12"	4 7/8" - 6 1/2"	*	*
2656T4	7"	6 3/4"	3" - 6"	3 1/4" - 4 7/8"	*	*
2656T4	9"	6 3/4"	6" - 8"	3 1/4" - 4 7/8"	*	*
2656T4	13"	6 3/4"	8" - 12"	3 1/4" - 4 7/8"	*	*

INCLUDES: PLATE, J-BOLT, U-BOLT AND 3 HEX NUTS



DOUBLE I-BEAM CLAMP

DOUBLE I-BEAM C	DOUBLE I-BEAM CLAMP						
PART NUMBER	STUD LENGTH	U-BOLT	FLANGE WIDTH	CHANNEL DEPTH	EG	HD	
2657T1	6"	3 3/8"	4" - 6"	13/16" - 1 5/8"	*	*	
2657T1	12"	3 3/8"	6" - 12"	13/16" - 1 5/8"	*	*	
2657T2	6"	5"	4" - 6"	1 5/8" - 3 1/4"	*	*	
2657T2	12"	5"	6" - 12"	1 5/8" - 3 1/4"	*	*	
2657T3	6"	8 1/2"	4" - 6"	4 7/8" - 6 1/2"	*	*	
2657T3	12"	8 1/2"	6" - 12"	4 7/8" - 6 1/2"	*	*	
2657T4	6"	6 3/4"	4" - 6"	3 1/4" - 4 7/8"	*	*	
2657T4	12"	6 3/4"	6" - 12"	3 1/4" - 4 7/8"	*	*	

INCLUDES: 2 PLATES, THREADED ROD STUD, 2 U-BOLTS AND 6 HEX NUTS

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel


\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316 **BK:** Plain Steel

AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

Please contact us for any other specialty combinations. Spec sheets are available on request.


BEAM CLAMPS (CONTINUED)




TOP BEAM CLAMP ADDITIONAL STYLES ARE AVAILABLE

TOP BEAM CLAMP	TOP BEAM CLAMP					is	
PART NUMBER	STYLE	ROD SIZE	THROAT OPENING	EG	SS4	вк	SS6
6014	Regular	1/4"	5/16"	SS	*	*	*
6138	Regular	3/8"	1 1/4"	SS	*	*	*
6112	Regular	1/2"	1 1/4"	*	*	*	*
6158	Regular	5/8"	1 1/4"	*	*	*	*
6134	Regular	3/4"	1 1/4"	*	*	*	*
6238	Junior	3/8"	5/8"	SS	*	SS	SS
6212	Junior	1/2"	5/8"	SS	*	*	*
6258	Junior	5/8"	5/8"	*	*	*	*
6234	Junior	3/4"	5/8"	*	*	*	*
6278	Junior	7/8"	5/8"	*	*	*	*

HOOK ROD ASSE	HOOK ROD ASSEMBLY					
PART NUMBER	DIAMETER	LENGTH (A)	FLANGE WIDTH	EG		
7366	3/8"	8 5/8"	3" - 7"	*		
73610	3/8"	12 5/8"	7" - 11"	*		




BEAM CLAMP				FINISH OPTI	ONS	
PART NUMBER	ROD SIZE	EG	HD	SS4	PVC	HEAVY DUTY
85838	3/8"	*	*	*	*	*
85812	1/2"	SS	*	SS	*	SS
85858	5/8"	*	*	*	*	*



BEAM CLAMP REGULAR AND HEAVY DUTY ARE AVAILABLE.

WIDE THROAT BE		FINISH OPTIONS				
PART NUMBER	ROD SIZE	THROAT OPENING	EG	НО	SS4	HEAVY DUTY
86512	1/2"-13	1 1/4"	SS	*	*	*
86538	3/8"-16	1 1/4"	*	*	*	*



WIDE THROAT BEAM CLAMP

FINISH OPTIONS

EG: Electro Galvanized SS4: Stainless Steel 304

SS6: Stainless Steel 316 BK: Plain Steel

AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

 $\label{lem:please contact} \textit{Please contact us for any other specialty combinations.} \ \textit{Spec sheets are available on request.}$


PIPE CLAMPS

Pipe clamps, also known as strut straps, come in a variety of sizes and finishes to meet your pipe-size and support needs. PUPCO carries a diverse inventory in rigid, EMT, universal, and OD pipe clamps.

PIPE CLAMPS

RIGID PIPE CLAM	IPS						FINISH OP	TIONS		
PART NUMBER	SIZE	вох оту	EG	HD	SS4	SS6	AL	ASSEMBLED	UNASSEMBLED	PVC
RIG38	3/8"	100	*	*	*	*	*	*	*	*
RIG12	1/2"	100	SS	SS	SS	*	*	SS	SS	*
RIG34	3/4"	100	SS	SS	SS	SS	SS	SS	SS	*
RIG1	1"	100	SS	SS	SS	SS	SS	SS	SS	*
RIG114	1 1/4"	100	SS	SS	SS	SS	SS	SS	SS	*
RIG112	1 1/2"	50	SS	SS	SS	SS	SS	SS	SS	*
RIG2	2"	50	SS	SS	SS	SS	SS	SS	SS	*
RIG212	2 1/2"	50	*	SS	SS	*	SS	*	SS	*
RIG3	3"	50	*	SS	SS	*	SS	*	SS	*
RIG312	3 1/2"	25	*	*	SS	*	*	*	SS	*
RIG4	4"	25	SS	SS	SS	*	SS	*	SS	*
RIG5	5"	25	*	*	*	*	*	*	SS	*
RIG6	6"	25	*	SS	SS	SS	*	*	SS	*
RIG8	8"	25	*	*	SS	*	*	*	SS	*
RIG10	10"	25	*	*	*	*	*	*	SS	*
RIG12"	12"	25	*	*	*	*	*	*	SS	*

EMT PIPE CLAMI	PS	FINISH OPTIONS			
PART NUMBER SIZE BOX		вох оту	EG	HD	SS6
ЕМТ38	3/8"	100	*	*	*
EMT12	1/2"	100	*	*	*
EMT34	3/4"	100	SS	SS	*
EMT1	1"	100	SS	*	*
EMT114	1 1/4"	100	*	*	*
EMT112	1 1/2"	50	SS	*	*
EMT2	2"	50	SS	*	*



RIGID PIPE CLAMPS

For use with IPS conduit

EMT PIPE CLAMPS

For use with EMT tubing

UNIVERSAL PIPE CLAMPS

Can be used in place of Rigid or EMT Pipe Clamps

UNIVERSAL PIPE	CLAMPS		FINISH OPTIONS					
PART NUMBER	SIZE	вох оту	EG	GD	НО	ASSEMBLED	UNASSEMBLED	
UNV12	1/2"	100	SS	*	*	SS	*	
UNV34	3/4"	100	SS	SS	*	SS	*	
UNV1	1"	100	SS	*	*	SS	*	
UNV114	1 1/4"	100	SS	*	*	SS	*	
UNV112	1 1/2"	50	SS	*	*	SS	*	
UNV2	2"	50	SS	*	*	SS	*	

FINISH OPTIONS

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Please contact us for any other specialty combinations. **Spec sheets are available on request.**

PIPE CLAMPS (CONTINUED)



OD PIPE CLAMPS

OD PIPE CL	AMPS		FINISH OPTIONS					
PART NUMBER	SIZE	BOX QTY	EG	HD	SS4	SS6		
0014	1/4"	100	*	*	*	*		
0038	3/8"	100	*	*	*	*		
0012	1/2"	100	*	*	*	*		
0058	5/8"	100	*	*	*	*		
0034	3/4"	100	*	*	*	*		
0078	7/8"	100	*	*	*	*		
001	1"	100	*	*	*	*		
00118	1 1/8"	100	*	*	*	*		
00114	1 1/4"	100	*	*	*	*		
00138	1 3/8'	100	*	*	*	*		
00112	1 1/2'	100	*	*	*	*		
00158	1 5/8'	50	*	*	*	*		
00134	1 3/4"	50	*	*	*	*		
00178	1 7/8"	50	*	*	*	*		
002	2"	50	*	*	*	*		
00218	2 1/8"	50	*	*	*	*		
00214	2 1/4"	50	*	*	*	*		
00238	2 3/8"	50	*	*	*	*		
00212	2 1/2"	50	*	*	*	*		
00258	2 5/8"	50	*	*	*	*		
00234	2 3/4"	50	*	*	*	*		
00278	2 7/8"	50	*	*	*	*		
003	3"	50	SS	*	*	*		
00318	3 1/8"	50	SS	*	*	*		
00314	3 1/4"	50	*	*	*	*		
00338	3 3/8"	50	*	*	*	*		
00312	3 1/2"	50	*	*	*	*		
00358	3 5/8"	25	*	*	*	*		
00334	3 3/4"	25	*	*	*	*		
00378	3 7/8"	25	*	*	*	*		
004	4"	25	*	*	*	*		
00418	4 1/8"	25	SS	*	*	*		
00414	4 1/4"	25	*	*	*	*		
00438	4 3/8"	25	SS	*	*	*		
00412	4 1/2"	25	*	*	*	*		
00458	4 5/8"	25	*	*	*	*		
00434	4 3/4"	25	*	*	*	*		
00478	4 7/8"	25	*	*	*	*		
005	5"	25	SS	*	*	*		

OD PIPE CL	AMPS (CONT.	1	FINISH OPTIONS				
PART NUMBER	SIZE	BOX QTY	EG	НО	SS4	SS6	
00518	5 1/8"	25	SS	*	*	*	
00514	5 1/4"	25	*	*	*	*	
00538	5 3/8"	25	*	*	*	*	
00512	5 1/2"	25	*	*	*	*	
00558	5 5/8"	25	*	*	*	*	
00534	5 3/4"	25	*	*	*	*	
00578	5 7/8"	25	*	*	*	*	
006	6"	25	*	*	*	*	
00618	6 1/8"	25	*	*	*	*	
00614	6 1/4"	25	*	*	*	*	
00638	6 3/8"	25	*	*	*	*	
00612	6 1/2"	25	*	*	*	*	
00658	6 5/8"	25	*	*	*	*	
00634	6 3/4"	25	SS	*	*	*	
00678	6 7/8"	25	SS	*	*	*	
007	7"	25	*	*	*	*	
00718	7 1/8"	25	*	*	*	*	
00714	7 1/4"	25	*	*	*	*	
00738	7 3/8"	25	*	*	*	*	
00712	7 1/2"	25	*	*	*	*	
00758	7 5/8"	25	SS	*	*	*	
00734	7 3/4"	25	SS	*	*	*	
00778	7 7/8"	25	*	*	*	*	
008	8"	25	*	*	*	*	
00818	8 1/8"	25	*	*	*	*	
00814	8 1/4"	25	*	*	*	*	
00838	8 3/8"	25	*	*	*	*	
00812	8 1/2"	25	*	*	*	*	
00858	8 5/8"	25	*	*	*	*	
00834	8 3/4"	1	*	*	*	*	
00878	8 7/8"	1	*	*	*	*	
O41	Calabaa						

Other sizes and finishes may available on request.


FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel **\$\$4:** Stainless Steel 304 **\$\$6:** Stainless Steel 316

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. Please contact us for any other specialty combinations. Spec sheets are available on request.

PIPE CLAMPS (CONTINUED)



PIPE STRAP / HOLD DOWN CLAMP

PIPE STRAP / HOLD	PIPE STRAP / HOLO DOWN CLAMP					FINISH OPTIONS				
PART NUMBER	SIZE	HOLES	WEIGHT/100 PCS.	EG	HD	SS4	SS6	AL		
312612	1/2"	2	23	*	SS	*	*	*		
312634	3/4"	2	26	*	SS	*	*	*		
31261	1"	2	31	*	*	*	*	*		
3126114	1 1/4"	2	35	*	SS	*	*	*		
3126112	1 1/2'	2	39	*	SS	*	*	*		
31262	2"	2	94	*	SS	*	*	*		
3126212	2 1/2"	2	114	*	*	*	*	*		
31263	3"	2	133	SS	*	*	*	*		
3126312	3 1/2"	2	152	*	*	*	*	*		
31264	4"	2	176	*	SS	*	*	*		
31265	5"	2	198	*	SS	*	*	*		
31266	6"	2	225	*	SS	*	*	*		
31268	8"	2	280	*	*	*	*	*		
312610	10"	2	335	*	*	*	*	*		
312612	12"	2	390	*	*	*	*	*		

PIPE STRAP		FINISH OPTIONS			
PART NUMBER	SIZE	HOLES	EG	SS4	SS6
FIG23114	1/4"	2	*	*	*
FIG23138	3/8"	2	*	*	*
FIG23112	1/2"	2	*	*	*
FIG23134	3/4"	2	*	SS	*
FIG2311	1"	2	*	SS	*
FIG231114	1 1/4"	2	*	*	*
FIG231112	1 1/2'	2	*	*	*
FIG2312	2"	2	*	SS	*
FIG231212	2 1/2"	2	*	*	*
FIG2313	3"	2	*	*	*
FIG2314	4"	2	*	*	*
FIG2316	6"	2	*	*	*
FIG23314	1/4"	1	*	*	*
FIG23338	3/8"	1	*	*	*
FIG23312	1/2"	1	*	SS	*
FIG23334	3/4"	1	*	SS	*
FIG2331	1"	1	*	SS	*
FIG233114	1 1/4"	1	*	*	*
FIG233112	1 1/2'	1	*	*	*
FIG2332	2"	1	*	*	*



2 hole



FIG233 PIPE STRAPS

1 hole

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel SS4: Stainless Steel 304 SS6: Stainless Steel 316 AL: Aluminum

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability. Please contact us for any other specialty combinations. Spec sheets are available on request.

PIPE CLAMPS


(CONTINUED)

STANDARD RISER C	LAMP		FINISH OPTIONS				
PART NUMBER	SIZE	ВК	EG	HD	SS4	SS6	CT
FIG5012	1/2"	*	*	*	*	*	*
FIG5034	3/4"	*	*	*	*	*	*
FIG501	1"	*	*	*	*	*	*
FIG50114	1 1/4"	*	*	*	*	*	*
FIG50112	1 1/2'	*	*	*	*	*	*
FIG502	2"	*	*	*	*	*	*
FIG50212	2 1/2"	*	*	*	*	*	*
FIG503	3"	*	SS	*	*	*	*
FIG50312	3 1/2"	*	*	*	*	*	*
FIG504	4"	*	*	*	SS	*	*
FIG505	5"	*	*	*	*	*	*
FIG506	6"	*	*	*	*	*	*
FIG508	8"	*	*	*	*	*	*
FIG5010	10"	*	*	*	*	*	*
FIG5012	12"	*	*	*	*	*	*
FIG5014	14"	*	*	*	*	*	*
FIG5016	16"	*	*	*	*	*	*
FIG5018	18"	*	*	*	*	*	*
FIG5020	20"	*	*	*	*	*	*



STANDARD RISER CLAMP

PARALLEL PIPE CLA	AMP	FINISH OPTIONS					
PART NUMBER	Size	EG	SS4	HD			
313812	1/2"	*	*	*			
313834	3/4"	*	SS	*			
31381	1"	SS	*	SS			
3138114	1 1/4"	*	*	*			
3138112	1 1/2"	*	*	*			
31382	2"	*	*	*			
3138212	2 1/2"	*	*	*			
31383	3"	*	*	*			
3138312	3 1/2"	*	*	*			
31384	4"	*	*	*			



PARALLEL PIPE CLAMP

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel

SS4: Stainless Steel 304 SS6: Stainless Steel 316 BK: Plain Steel

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.


Please contact us for any other specialty combinations. Spec sheets are available on request.

PIPE CLAMPS (CONTINUED)

FIBERGLASS PIPE CLAMPS		FINISH OPTIONS
PART NUMBER	Size	FG
PCR050FG	1/2"	SS
PCR075FG	3/4"	SS
PCR100FG	1"	SS
PCR125FG	1 1/4"	SS
PCR150112FG	1 1/2"	SS
PCR2002FG	2"	SS
PCR3003FG	3"	SS
PCR4004FG	4"	*
PCR6006FG	6"	*
PCR8008FG	8"	*


RIGHT ANGLE PIPE OR CONDUIT CLAMP		FINISH OPTIONS			
PART NUMBER	Size	HD	SS4	SS6	PVC
RA38	3/8"	SS	*	*	*
RA12	1/2"	SS	*	SS	*
RA34	3/4"	SS	*	SS	*
RA1	1"	SS	*	SS	*
RA114	1 1/4"	SS	*	SS	*
RA112	1 1/2"	SS	*	SS	*
RA2	2"	SS	*	SS	*
RA212	2 1/2"	SS	*	SS	*
RA3	3"	SS	*	SS	*
RA312	3 1/2"	SS	*	*	*
RA4	4"	SS	*	SS	*
RA5	5"	*	*	*	*
RA6	6"	*	*	*	*

STANDOFF CLAMP		FINISH OPTIONS				
Part Number	Size	EG	SS4	SS6		
S012	1/2"	*	SS	*		
S034	3/4"	SS	SS	SS		
S01	1"	*	SS	SS		
S0114	1 1/4"	*	SS	SS		
S0112	1 1/2"	*	SS	*		
S02	2"	*	SS	*		
S0212	2 1/2"	*	*	*		
S03	3"	*	*	*		
S0312	3 1/2"	*	SS	*		
S04	4"	*	SS	*		



PIPE CLAMP

ADJUSTABLE FIBERGLASS PIPE CLAMPS ARE ALSO AVAILABLE. PLEASE CALL FOR DETAILS.



RIGHT ANGLE PIPE CLAMP



STANDOFF CLAMP

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel SS4: Stainless Steel 304

SS6: Stainless Steel 316

AL: Aluminum

AVAILABILITY

SS: Standard stocking item.

*: Please contact us for availability.

Please contact us for any other specialty combinations. Spec sheets are available on request.

HYDRA-ZORB



CUSHION CLAMP		FINISH OPTIONS				
PART NUMBER	SIZE	MILD STEEL	SS4	SS6	AL	
OD TUBE						
100025	1/4"	SS	*	SS	*	
100031	5/16"	*	*	SS	*	
100037	3/8"	SS	*	SS	*	
100047	0.47"	*	*	SS	*	
100050	1/2"	SS	SS	*	*	
100062	5/8"	SS	*	SS	*	
100075	3/4"	SS	*	SS	*	
100087	7/8"	SS	*	SS	*	
100100	1"	SS	*	SS	*	
100112	1 1/8"	SS	*	*	SS	
100125	1 1/4"	SS	*	*	*	
100137	1 3/8"	SS	*	SS	*	
100150	1 1/2"	SS	*	SS	*	
100162	1 5/8"	SS	*	*	*	
100175	1 3/4"	SS	*	*	*	
100187	1 7/8"	SS	*	SS	*	
100200	2"	SS	*	SS	*	
100121	2 1/8"	SS	*	*	*	
100225	2 1/4"	SS	*	*	*	
100237	2 3/8"	*	*	*	*	
100251	2 1/2"	SS	*	*	*	
100262	2 5/8"	SS	*	*	*	
10300	3"	SS	*	*	*	
100312	3 1/8"	SS	*	*	*	
100362	3 5/8"	*	*	*	*	
100400	4"	*	*	SS	*	
100412	4 1/8"	*	*	*	*	
100425	4 1/4"	*	*	*	*	
100437	4 3/8"	*	*	*	*	
100462	4 5/8"	*	*	*	*	
100500	5"	*	*	*	*	
100512	5 1/8"	*	*	*	*	
100600	6"	*	*	*	*	
100612	6 1/8"	*	*	*	*	
100637	6 3/8"	*	*	*	*	
100650	6 1/2"	*	*	*	*	

PUPCO proudly offers Hydra-Zorb Cushion Clamps. Invented in 1966, Hydra-Zorb Cushion Clamps are the original cushioned strut clamp. These clamps are typically used in plumbing, hydraulic, pneumatic, and HVAC applications where damage from pipe movement is a concern. Hydra-Zorb Cushion Clamps secure uninsulated tube and pipe runs against damage from shock, movement and vibration, eliminating metal to metal contact. The cushion material is thermoplastic elastomer, which is rated from -65 degrees to +275 degrees Fahrenheit.



Cushion Clamps continued on next page.

HYDRA-ZORB (CONTINUED)



CUSHION CLAMP (CONTINUED)		FINISH OPTIONS				
PART NUMBER	SIZE	MILD STEEL	SS4	SS6	AL	
NOM PIPE						
200025	1/4"	*	*	*	*	
200037	3/8"	SS	*	*	*	
200050	1/2"	SS	*	*	*	
200075	3/4"	SS	SS	SS	*	
200100	1"	*	*	SS	*	
200125	1 1/4"	SS	*	*	*	
200150	1 1/2"	SS	SS	SS	*	
200200	2"	SS	SS	*	*	
200250	2 1/2"	SS	*	*	*	
200300	3"	SS	*	SS	*	
200350	3 1/2"	*	*	*	*	
200400	4"	SS	*	SS	*	
200500	5"	*	*	*	*	
200600	6"	*	*	*	*	



SPECIALTY PRODUCTS

PUPCO has a vast array of products on hand and the supplier relationships to source specialty products to meet your customer's demands. Reach out to your sales representative for a quote.

FINISH OPTIONS

\$\$4: Stainless Steel 304 **\$\$6:** Stainless Steel 316

AL: Aluminum **Mild Steel:** Trivalent (non-hex) plated mild steel

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Please contact us for any other specialty combinations. Spec sheets are available on request.




piping purposes. We carry a variety of sizes and finishes

to meet your needs.

PIPE HANGERS

CLEVIS HANGERS				FINISH	OPTIONS			
PART NUMBER	DIMENSIONS	PIPE OD	BOLT	EG	HD	SS4	SS6	
ADJUSTABLE	ADJUSTABLE CLEVIS HANGER							
FIG1112	1/2"	0.840	1/4"	*	*	*	*	
FIG1134	3/4"	1.050	1/4"	*	*	*	*	
FIG111	1"	1.315	1/4"	SS	*	*	*	
FIG11114	1 1/4"	1.660	1/4"	*	*	*	*	
FIG11112	1 1/2"	1.900	1/4"	*	*	SS	*	
FIG112	2"	2.375	1/4"	SS	*	SS	*	
FIG11212	2 1/2"	2.870	5/16"	*	*	*	*	
FIG113	3"	3.500	5/16"	SS	*	SS	*	
FIG11312	3 1/2"	4.000	5/16"	*	*	*	SS	
FIG114	4"	4.500	3/8"	SS	*	SS	*	
FIG115	5"	5.563	1/2"	*	*	*	*	
FIG116	6"	6.625	1/2"	SS	*	SS	*	
FIG117	7"	7.625	1/2"	*	*	*	*	
FIG118	8"	8.625	5/8"	SS	*	*	*	
FIG1110	10"	10.750	3/4"	*	*	*	*	
FIG1112	12"	12.750	3/4"	*	*	*	*	
FIG1114	14"	14.000	7/8"	*	*	*	*	
FIG1116	16"	16.000	1"	*	*	*	*	
FIG1118	18"	18.000	1"	*	*	*	*	
FIG1120	20"	20.000	1 1/4"	*	*	*	*	
FIG1124	24"	24.000	1 1/4"	*	*	*	*	
FIG1130	30"	30.000	1 1/4"	*	*	*	*	
LIGHT WEIGH	IT CLEVIS HANGE	R						
Fig11038	3/8"	0.625	1/4"	*	*	N/A	*	
FIG11012	1/2"	0.840	1/4"	*	*	N/A	*	
FIG11034	3/4"	1.050	1/4"	*	*	N/A	*	
FIG1101	1"	1.315	1/4"	*	*	N/A	*	
FIG110114	1 1/4"	1.660	1/4"	*	*	N/A	*	
FIG110112	1 1/2"	1.900	1/4"	*	*	N/A	*	
FIG1102	2"	2.375	1/4"	*	*	N/A	*	
FIG110212	2 1/2"	2.870	1/4"	*	*	N/A	*	
FIG1103	3"	3.500	5/16"	*	*	N/A	*	
FIG110312	3 1/2"	4.000	5/16"	*	*	N/A	*	
FIG1104	4"	4.500	3/8"	*	*	N/A	*	



CLEVIS HANGER

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **\$\$4:** Stainless Steel 304 **\$\$6:** Stainless Steel 316

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Other Clevis Hangers available include, Flat Top, Adjustable Clevis Hanger for Ductile Iron Pipe, V Bottom, Extended Bottom, Clevis Hanger with Welded Shield.

PIPE HANGERS (CONTINUED)

PIPE HANGERS					FINISH OPTIONS	
PART NUMBER	DIMENSIONS	PIPE OD	BOLT	EG	SS4	PVC
J-HANGER						
FIG41812	1/2"	0.840	1/4"	*	*	*
FIG41834	3/4"	1.050	1/4"	*	*	*
FIG4181	1"	1.315	1/4"	*	*	*
FIG418114	1 1/4"	1.660	1/4"	*	*	*
FIG418112	1 1/2"	1.900	1/4"	*	*	*
FIG4182	2"	2.375	1/4"	*	*	*
FIG418212	2 1/2"	2.870	3/8"	*	*	*
FIG4183	3"	3.500	3/8"	*	*	*
FIG418312	3 1/2"	4.000	3/8"	*	*	*
FIG4184	4"	4.500	3/8"	*	*	*
FIG4185	5"	5.563	3/8"	*	*	*
FIG4186	6"	6.625	3/8"	*	*	*
FIG4188	8"	8.625	3/8"	*	*	*
FIG41810	10"	10.750	3/8"	*	*	*



FINISH OPTIONS

EG: Electro Galvanized SS4: Stainless Steel 304

PVC: Polyvinyl Chloride

AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other pipe hangers are available for specific applications.

PIPE HANGERS (CONTINUED)

PIPE COVERING PROTECTION SHIELD					FIN	IISH OPTIC	INS	
PART NUMBER	SIZE NO.	LENGTH	GUAGE	DIAMETER	HANGER SIZE	PG	SS4	SS6
FIG300	0	12	24	1 7/8"	1 1/2"	SS	*	*
FIG300	1	12	24	2 3/8"	2"	*	*	*
FIG300	2	12	24	2 7/8"	2 1/2"	*	*	*
FIG300	3	12	18	3 1/2"	3"	SS	*	*
FIG300	4	12	18	4"	3 1/2"	*	*	*
FIG300	5	12	18	4 1/2"	4"	*	*	*
FIG300	6	12	18	5"	5"	*	*	*
FIG300	7	12	18	5 9/13"	5"	*	*	*
FIG300	8	12	18	6 5/8"	6"	*	*	*
FIG300	9	12	18	7 5/8"	8"	*	*	*
FIG300	10	12	18	8 5/8"	8"	*	*	*
FIG300	13	12	18	9 5/8"	10"	*	*	*
FIG300	14	12	18	10 3/4"	10"	*	*	*
FIG300	15	12	18	11 3/4"	12"	*	*	*
FIG300	16	12	18	12 3/4"	12"	*	*	*
FIG300	17	12	16	14"	14"	*	*	*
FIG300	18	12	16	15"	16"	*	*	*
FIG300	19	12	16	16"	16"	*	*	*
FIG300	20	12	16	17"	18"	*	*	*
FIG300	21	12	16	18"	18"	*	*	*
FIG300	22	12	16	19"	20"	*	*	*
FIG300	23	12	16	20"	20"	*	*	*
FIG300	24	12	16	21"	24"	*	*	*
FIG300	25	12	16	22"	24"	*	*	*
FIG300	26	12	16	23"	24"	*	*	*
FIG300	27	12	16	24"	24"	*	*	*
FIG300	28	12	16	26"	30"	*	*	*
FIG300	29	12	16	27"	30"	*	*	*
FIG300	30	12	16	28'	30"	*	*	*



PIPE COVERING PROTECTION SHIELD

FINISH OPTIONS

PG: Pre-galvanized Steel **SS4:** Stainless Steel 304

SS6: Stainless Steel 316

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

In addition to the offerings illustrated, hundreds of other pipe hangers are available for specific applications.

PIPE HANGERS (CONTINUED)

BAND HANGER		FINISH OPTIONS				
PART NUMBER	SIZE NO.	EG	SS4	SS6		
FIG3138	3/8"	*	*	*		
FIG3112	1/2"	*	*	*		
FIG3134	3/4"	*	*	*		
FIG311	1"	*	SS	*		
FIG31114	1 1/4"	*	SS	*		
FIG31112	1 1/2"	*	SS	*		
FIG312	2"	*	SS	*		
FIG31212	2 1/2"	*	*	*		
FIG313	3"	*	SS	*		
FIG31312	3 1/2"	*	*	*		
FIG314	4"	*	SS	*		
FIG315	5"	*	*	*		
FIG316	6"	*	*	*		
FIG318	8"	*	*	*		



BAND HANGER

HANGER FLANGE PL	ATE	FINISH OPTIONS			
PART NUMBER	Size No.	EG	SS4	СР	
FIG41A38	3/8"	SS	SS	SS	
FIG41A12	1/2"	*	*	*	
FIG41A34	3/4"	*	*	*	
FIG41A1	1"	*	*	*	
FIG41A114	1 1/4"	*	*	*	
FIG41A112	1 1/2"	*	*	*	
FIG41A2	2"	*	*	*	
FIG41A212	2 1/2"	*	*	*	
FIG41A3	3"	*	*	*	
FIG41A312	3 1/2"	*	*	*	
FIG41A4	4"	*	*	*	



HANGER FLANGE PLATE

FINISH OPTIONS

EG: Electro Galvanized SS4: Stainless Steel 304 **SS6:** Stainless Steel 316 **CP:** Copper

AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other pipe hangers are available for specific applications.

PIPE HANGERS

(CONTINUED)

SPLIT RING EXTENSION H	FINISH OPTIONS			
PART NUMBER	Size No.	EG	SS4	СР
FIG4138	3/8"	*	*	*
FIG4112	1/2"	*	SS	*
FIG4134	3/4"	*	SS	*
FIG411	1"	*	SS	*
FIG41114	1 1/4"	*	*	*
FIG41112	1 1/2"	*	SS	*
FIG412	2"	*	SS	*
FIG41212	2 1/2"	*	*	*
FIG413	3"	*	*	*
FIG41312	3 1/2"	*	*	*
FIG414	4"	*	*	*



SPLIT RING EXTENSION HANGER

SPLIT RING EXTENSION H	I	FINISH OPTION	S	
PART NUMBER	Size No.	EG	SS4	СР
FIG41H38	3/8"	*	*	*
FIG41H12	1/2"	*	*	SS
FIG41H34	3/4"	SS	*	SS
FIG41H1	1"	SS	*	SS
FIG41H114	1 1/4"	*	*	*
FIG41H112	1 1/2"	*	*	*
FIG41H2	2"	SS	*	SS
FIG41H212	2 1/2"	*	*	*
FIG41H3	3"	*	*	*
FIG41H312	3 1/2"	*	*	*
FIG41H4	4"	SS	*	*



SPLIT RING HINGE DESIGN

FINISH OPTIONS

EG: Electro Galvanized **SS4:** Stainless Steel 304 **CP:** Copper

AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

 $In \ addition \ to \ the \ of ferings \ illustrated, hundreds \ of \ other \ pipe \ hangers \ are \ available \ for \ specific \ applications.$

A staple in pipe support
and management. U-Bolts
are found in a myriad of
construction projects and come
in sizes ranging from one half
inch ranging up to 36 inches.

U-BOLTS

U-BOLTS			FINISH OPTIONS					
PART NUMBER	DIMENSIONS	ROD SIZE	EG	HD	GD	PVC	SS4	SS6
UB12	1/2"	1/4"	*	*	*	*	*	*
UB34	3/4"	1/4"	*	*	*	*	*	*
UB1	1"	1/4"	*	*	*	*	*	*
UB114	1 1/4"	3/8"	*	*	*	*	*	*
UB112	1 1/2"	3/8"	*	SS	*	*	SS	*
UB2	2"	3/8"	SS	SS	*	*	SS	*
UB212	2 1/2"	1/2"	SS	*	*	*	*	*
UB3	3"	1/2"	SS	SS	*	*	SS	*
UB312	3 1/2"	1/2"	*	*	*	*	*	*
UB4	4"	1/2"	SS	*	*	*	SS	*
UB5	5"	1/2"	*	*	*	*	*	*
UB6	6"	5/8"	SS	*	*	*	SS	*
UB8	8"	5/8"	SS	*	*	*	SS	*
UB10	10"	3/4"	SS	*	*	*	*	*
UB12	12"	7/8"	*	*	*	*	*	*
UB14	14"	7/8"	*	*	*	*	*	*
UB16	16"	7/8"	*	*	*	*	*	*
UB18	18"	1"	*	*	*	*	*	*
UB20	20"	1"	*	*	*	*	*	*
UB24	24"	1"	*	*	*	*	*	*
UB30	30"	1"	*	*	*	*	*	*
UB36	36"	1"	*	*	*	*	*	*



U-BOLTS

SQUARE U-BO	FINISH OPTIONS			
PART NUMBER	DIMENSIONS	ROD SIZE	EG	НО
SQUB38338	3 3/8"	3/8"	*	*
SQUB385	5"	3/8"	*	*
SQUB3867	6" X 7"	3/8"	*	*
SQUB38812	8 1/2"	3/8"	*	*
SQUB3874	7" X 4"	3/8"	*	SS
SQUB3869	6" X 9"	3/8"	*	*
SQUB3894	9" X 2 1/2"	3/8"	*	*



SQUARE U-BOLTS

FINISH OPTIONS

EG: Electro Galvanized **HD:** Hot Dipped Galvanized Steel **GD:** Gold-Zinc Trivalent Chromium **SS4:** Stainless Steel 304 **SS6:** Stainless Steel 316

AVAILABILITY

\$\$: Standard stocking item. ***:** Please contact us for availability.

In addition to the offerings illustrated, hundreds of other U-Bolts are available for specific applications.

Other U-Bolts available include Light Duty and Square.



PUPCO maintains a stable of key fasteners utilized in our strut channel and mechanical support systems. Contact your sales representative for your fastener needs and we can also help you source hard to find fasteners for special projects and harsh environments

FASTENERS OVERVIEW



FLAT WASHER

Flat washers are also known as plain washers. The purpose of this type of a washer is to distribute the fastener's load while reducing heat and friction during the tightening process. They can also be used as spacers and to provide electrical insulation.




LOCK WASHER

The purpose of a lock washers is to distribute the fastener's load while reducing heat and friction during the tightening process. Lock washers are used in lieu of a flat washer in applications where there is a tendency for the fastener to rotate or lose frication as a result of vibration or torque.



FENDER WASHER

Fender washers are a type of flat washer. Fender washers have a larger outside diameter as compared to the inside diameter. This allows the washer to distribute loads to a larger area when compared to a flat washer.



HEX HEAD SCREW

Hex head cap screws have a thick, hexagonal head with a washer face under the head to provide ample vearing surface for tightening with a wrench. Hex head cap screws are general purpose threaded fasteners designed for use in pre-tapped holes, or for use with nuts.



HEX NUT

Hex nuts are general purpose fasteners used to fasten a bolt or screw to another object. A hex nut's hexagonal shape allows for ease in grasping and tightening.



WEDGE ANCHOR

A wedge anchor is a mechanical expansion anchor that consists of a threaded anchor body, an expansion clip, a nut and a washer. Wedge anchors are used to connect structural and non-structural elements to concrete.

FINISH OPTIONS

EG: Electro Galvanized HD: Hot Dipped Galvanized Steel **\$\$4:** Stainless Steel 304 **\$\$6:** Stainless Steel 316 AL: Aluminum GD: Gold-Zinc Trivalent Chromium

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

Square washers can be found with the Flat Fittings.

In addition to the offerings illustrated, hundreds of other fasteners are available for specific applications.

ADDITIONAL PRODUCTS

STAINLESS RIGID COI	TIUON	FINISH OPTIONS		
PART NUMBER	SIZE	SS4	SS6	
SRC12	1/2"	*	*	
SRC34	3/4"	SS	*	
SRC1	1"	*	*	
SRC114	1 1/4"	*	*	
SRC112	1 1/2"	SS	*	
SRC2	2"	SS	*	
SRC212	2 1/2"	*	*	
SRC3	3"	*	*	
SRC4	4"	*	*	



Available in 10' lengths

STAINLESS STEEL (COUPLINGS	FINISH OPTIONS		
PART NUMBER	SIZE	SS4	SS6	
CPL12	1/2"	*	*	
CPL34	3/4"	SS	*	
CPL1	1"	*	*	
CPL114	1 1/4"	*	*	
CPL112	1 1/2"	*	*	
CPL2	2"	*	*	
CPL212	2 1/2"	*	*	
CPL34	3"	*	*	
CPL4	4"	*	*	



STAINLESS STEEL COUPLINGS

CONDULET BODY		FINISH OPTIONS				
PART NUMBER SIZE		НО	SS6			
TYPE LB						
LB34	3/4"	*	*			
LB1	1"	*	*			
LB114 1 1/4"		*	*			
ТҮРЕ Т						
T34	3/4"	*	SS			
T1	1 1"		SS			







TYPE T
CONDULET BODY

FINISH OPTIONS

HD: Hot Dipped Galvanized Steel Stainless Steel 304

SS6: Stainless Steel 316

AVAILABILITY

\$5: Standard stocking item. ***:** Please contact us for availability.

Please contact us for any other specialty combinations. Spec sheets are available on request.

ADDITIONAL PRODUCTS

ADDITIONAL PRODUCTS (CONTINUED)

SLOTTED ANGLE			FINISH OPTIONS			
PART NUMBER	SIZE	Gauge	PG	7' 6"	10"	12"
SA14	1 1/2" x 1 1/2"	14	SS	SS	*	*
SA21	1 1/2" x 2 1/4"	14	*	*	*	*
SA31	1 1/2" x 3"	12	*	*	*	*



ROOF BLOCKS	FINISH OPTIONS		
PART NUMBER	SIZE	PG	
HBS10H132PG	1 5/8" 12 ga.	*	
HBS10H164PG	13/16" 14 ga.	SS	





ROOF BLOCKS

MYERS HUBS		FINISH OPTIONS
PART NUMBER	SIZE	SS6
MH12SS6	1/2"	*
MH34SS6	3/4"	SS
MH1SS6	1"	SS
MH114SS6	1 1/4"	*
MH112SS6	1 1/2"	*
MH2SS6	2"	SS
MH212SS6	2 1/2"	*
MH3SS6	3"	*



MYERS HUBS

FINISH OPTIONS

SS6: Stainless Steel 316

AVAILABILITY

SS: Standard stocking item. *: Please contact us for availability.

 $\label{lem:please contact} \textbf{Please contact us for any other specialty combinations.} \textbf{Spec sheets are available on request.}$



MEET OUR SALES REPS



T.WILLIAMS@PUPCO.COM 704.375.0776

Tim is a strategic account specialist who works in collaboration with electrical and mechanical manufacturers and manufacturer's representatives in the southeast United States since 1979. Tim is a valued PUPCO team member offering expertise in raceway and support solutions. Tim is a native North Carolina resident who is married with two children. He is an outdoor enthusiast; his favorites include golf, hiking and camping.



TONYA S.
T.SLAGLE@PUPCO.COM
704.375.0776

Tonya is an enthusiastic sales associate with over 7 years of experience in the sale and distribution of electrical and mechanical components. Throughout her career she has earned the trust of her customers and has maintained strong relationships to generate repeat business. She attributes her success to her ability to listen to customers and put their needs first. Outside of work, Tonya enjoys traveling and spending time with her two boys, family and friends.



ANDREW P. A.PICKETT@PUPCO.COM 704.375.0776

Andrew has worked in the mechanical and electrical industry for over 13 years. He seeks to exceed his customer's expectations by providing expertise, timely responses, and an exceptional level of customer service. Andrew's hard-working and detail-oriented nature make him a valued resource to his customers. In his free time, Andrew enjoys long walks, hiking and spending time with his young daughter and wife.



TYLER R. T.RIGGINS@PUPCO.COM 704.375.0776

Tyler is a results-oriented sales representative with over 10 years of professional experience in the electrical industry offering in-depth knowledge of electrical products and components. He is committed to improving team quotas and exceeding meaningful goals. Tyler prides himself in executing successful relationships with his customers. He is solution focused and always goes the extra mile for his clients to ensure their satisfaction. In his free time he enjoys grilling, spending time outdoors with his wife and young daughter.



SALLY K. S.KELLAR@PUPCO.COM 330.992.2823

Sally Kellar is an enthusiastic and outgoing General Manager at PUPCO North. With 22 year's experience of selling channel accessories, she has built a good rapport with her customers. She has been able to find special items for her customers when in need. Throughout her career she has earned the trust and respect of her customers which has led to many friendships and repeat business. When Sally is not working, she enjoys fishing, m otorcycle riding w ith her husband, and spending time with her family and grandkids.



TIFFANY B. T.BACHHOFER@PUPCO.COM 330.992.2823

Tiffany cares about her customers and goes above and beyond to make sure she provides them with the best pricing and service. Tiffany is a 10 year sales veteran and has built a great relationship and rapport with many companies in this Industry. She is a very hard worker and strives to do her best to make your job easier. She is fun loving and caring, and in her spare time she loves to be with her daughter and family. She has a positive attitude and great work ethic, and will provide the best service consistently.



DELIVERING THE COMPONENTS THAT SUPPORT OUR WORLD.

TO ORDER, CALL:

NORTH 330-992-2823

SOUTH 704-375-0776

PUPCO.COM